


**Data Sheet**

Product Category: IF SAW Filter

Part Number
838-IF70.0M-KAPackage
38.0 x 25.0 Thru HoleApplication
Base Station & RepeaterLast Modified
May 24 2003**TYPE :**

70.0 MHz Bandpass Filter

18.6 MHz Bandwidth


PART NUMBER :**838-IF70.0M-KA****OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS**

PARAMETERS	Minimum	Typical	Maximum	Units
Center Frequency	69.94	70.00	70.06	MHz
Insertion Loss	-	25.5	27.0	dB
1dB Bandwidth	18.40	18.45	-	MHz
3dB Bandwidth	18.60	18.65	-	MHz
40dB Bandwidth	-	19.50	19.60	MHz
50dB Bandwidth	-	19.60	19.70	MHz
Passband Ripple	-	0.60	1.0	dB
Group Delay Variation	-	55	100	nsec
Absolute Delay	-	4.43	-	µsec
Ultimate Rejection	50	55	-	dB

* Custom SAW IF Filters available. Contact Oscilent for assistance.

PACKAGE OUTLINE (mm)**TEST FIXTURE**

Contact Oscilent for Test Fixture Details

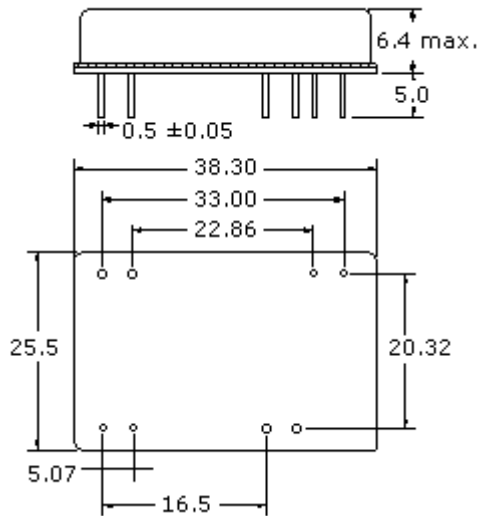

Oscilent Corporation - CALL **949.252.0522**

Part No.: 838-IF70.0M-KA

17962 Sky Park Circle, Building D, Irvine, CA 92614, USA
Fax: 949.252.0599, E-Mail: Sales@Oscilent.com

Crystal Oscillators | Quartz Crystal | TCXO | VCXO | IF SAW Filter | RF SAW Filter | Ceramic Resonator
Crystal Filter | Ceramic Filter | SAW Filter / SAW Devices | Site Map