



Data Sheet

telephone
949 252 0522



Product Category: SMD Quartz Crystal

Series Number	Package	Description	Last Modified
229	3.2 x 1.5 Chip Type	SMD Quartz Crystal	Nov. 17, 2011

FEATURES


- Ultra miniature 3.2x1.5mm ceramic package tuning fork crystal resonator type quartz crystal
- Low profile of 0.75mm
- Tight stability / High reliability
- Low cost
- Suitable for mobile telecommunications as well as other applications
- Tape and Reel
- RoHS / Lead Free compliant



OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	SYMBOL	CONDITION	MINIMUM	TYPICAL	MAXIMUM	UNITS
Frequency Range	Fo	-	-	32.768	-	KHz
Frequency Tolerance	$\Delta F/Fo$	@ 25°C	±10	±20	±100	ppm
Temperature Coefficient	K	REFTO25°C	-	-	-0.42	ppm(Δ°C)
Operating Temperature	TORP	-	-40	-	+85	°C
Storage Temperature	TSTG	-	-40	-	+85	°C
Shunt Capacitance	Co	-	-	1.5	2	pF
Motional Capacitance	C1	-	-	2	4	fF
Load Capacitance	CL	-	6	12.5	Series	pF
Insulation Resistance	IR	100VDC	500	-	-	M
Drive Level	DL	-	-	-	1	μW
Aging (First Year)	Fa	@25°C±30°C	-5.0	-	+5.0	Ppm
Equivalent Series Resistance (ESR)	RS	-	-	-	80	KΩ

PACKAGE DIMENSIONS

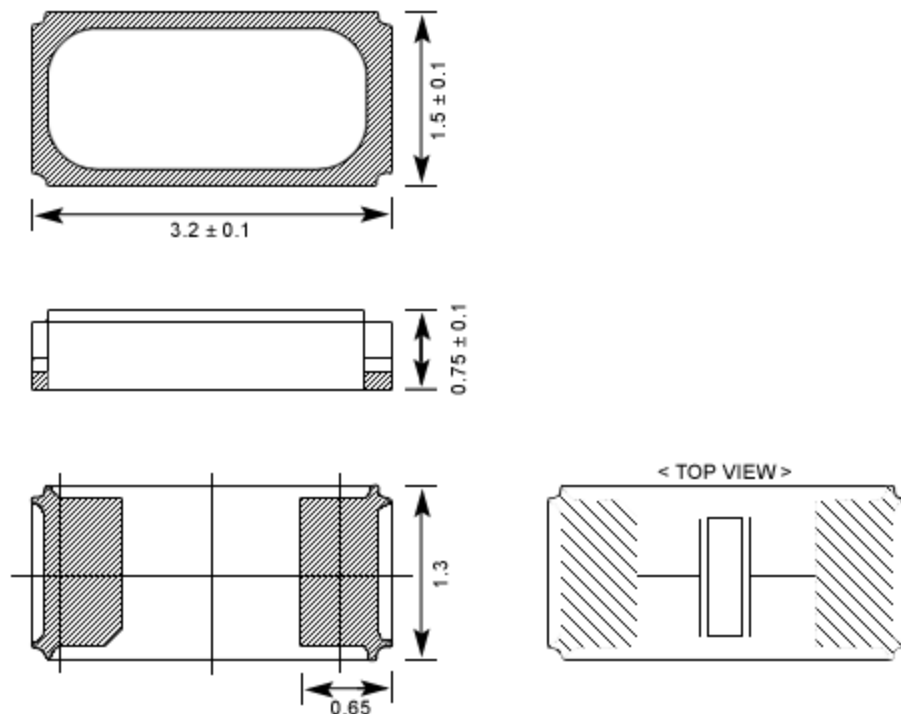

PART NUMBER GUIDE

Example: **229-32.768K-SR-20-W-TR**
 (All fields separated by a dash "-")

Series Number	Frequency	Load Capacitance	Tolerance @ +25°C	Operating Temp (°C)	Packaging**
229	32.768K	SR	20	W	TR
Oscilent 3.2 x 1.5 SMD	Enter desired frequency. Avail. = 32.768KHz	Enter desired capacitance here. Avail. = 6 ~ 12.5pF * SR for series	Blank * = ±30 PPM 10 = ±10 PPM 15 = ±15 PPM 20 = ±20 PPM 25 = ±25 PPM 50 = ±50 PPM Avail. = ±10 ~ ±100	P = 0~+50 R = -10~+60 S = -20~+70 T = -30~+80 W = -40~+85	Blank* = Bulk TR = Tape/Reel
<p>NOTE: Deviations on all parameters available. Please consult Oscilent for details. DEFINITIONS: Click on the characteristic names above for definitions of that particular characteristic. *STANDARDS: "Blank" part number selections indicate standard variables for that particular characteristic. **PACKAGING: Click on the packaging name above for tape/reel specifications</p>					

Oscilent Corporation - CALL **1.949.252.0522**

Series No.: **229**

18226 McDermott Street , Building B , Irvine , CA 92614 , USA
 Fax: 1.949.252.0599 , E-Mail: Sales@Oscilent.com