



# PRODUCT SPECIFICATION

REV O Dec 01 2016

Oscilent Controlled Document

Product Part Number	Product Description
Product Overview	Multi-Mode Antenna



## Contents

- o Part Number Builder
- o Product Options
- o Dimensions and Graphs
- o Environmental Testing
- o Caution of Use

## Application

- o BD + GPS
- o GPS + GLONASS





# Product Overview

Dec 01 2016 Rev O

Multi-Mode Antenna







## Part Number Builder

Series Number	Select Frequency	Polarization Mode	Dimensions + Type	Frequency Tolerance	Individual Specification
<b>1301 –</b>		<b>R</b>	–	–	–
1301= Square	1568 = 1561 ~ 1575 MHz  1590 = 1575 ~ 1610 MHz	R = RHCP L = LHCP X = Linear Polarization	e.g. 1840 = 18x18x4.0 A = feeding pin position	015 = ±1.5 020 = ±2.0 025 = ±2.5 030 = ±3.0 050 = ±5.0 040 = ±4.0 100 = ±10.0 130 = ±13.0 150 = ±15.0 DF = Double Freq	Internal code for product structure, electrode shape, marking, and special parameters

## Product Options

Oscilent Part Number	Size (mm)	Nominal Frequency (MHz)	-10dB Bandwidth (MHz) min.	VSWR (in BW) max.	Ground Plane Size	Application
1301-1568R-3560A	35 x 35	1561 ~ 1575	36.0	2.0	50 x 50	BD + GPS
1301-1568R-3560A	25 x 25	1561 ~ 1575	30.0	2.0	70 x 70	BD + GPS
1301-1590R-3560A	35 x 35	1575 ~ 1610	40.0	2.0	50 x 50	GPS + GLONASS
1301-1590R-2540A	25 x 25	1575 ~ 1610	36.0	2.0	70 x 70	GPS + GLONASS
1301-1590R-1840A	18 x 18	1575 ~ 1610	-	-	50 x 50	GPS + GLONASS
1301-1590R-1540A	15 x 15	1575 ~ 1610	-	-	50 x 50	GPS + GLONASS
1301-1590R-1340A	13 x 13	1575 ~ 1610	-	-	50 x 50	GPS + GLONASS



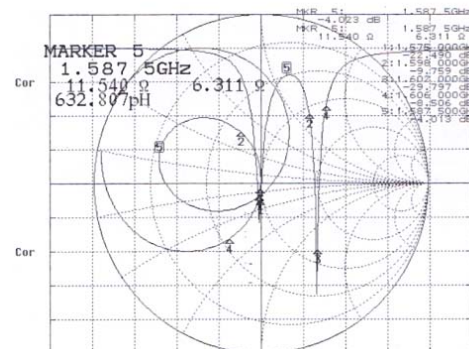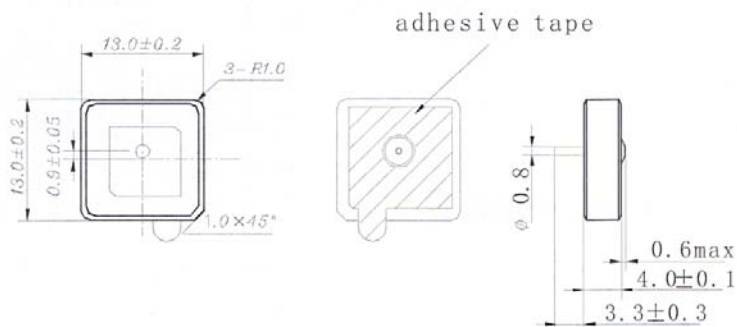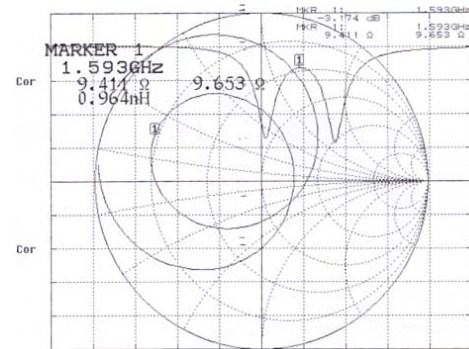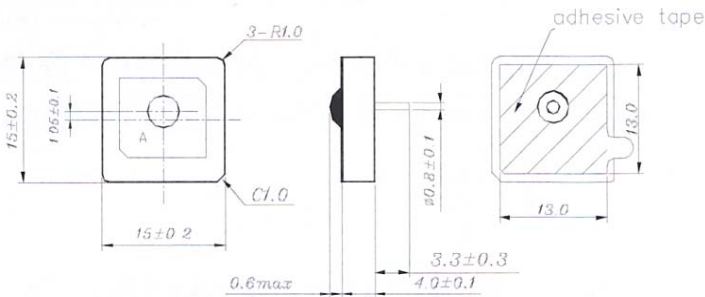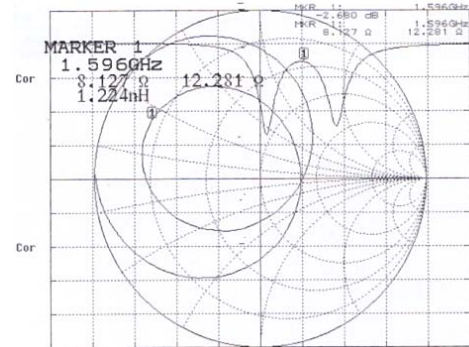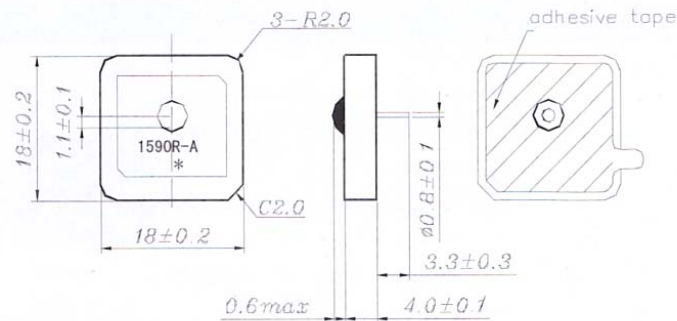

\* Contact Oscilent for additional drawings and graphs



## Environmental Testing

Item	Test Condition	Remark	
Humidity Test	Subject to 90%~95% relative humidity $60^{\circ}\text{C}\pm 3^{\circ}\text{C}$ for 96h, then dry at $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$ , less than 65% relative humidity for 2h~4h.	It shall fulfill the specifications in Table 1.	
High Temperature Exposure	Satisfy the specification in table 1 after leaving at $105^{\circ}\text{C}$ for 96h, measured within 2h~4h leaving in $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$ and less than 65% relative humidity.		
Low Temperature	Satisfy the specification in table 1 after leaving at $-40^{\circ}\text{C}$ for 96h, measured with 2h~4h leaving in $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$ and less than 65% relative humidity.		
Temperature Cycle	Subject the device to $-40^{\circ}\text{C}$ for 30 min. followed by a high temperature of $105^{\circ}\text{C}$ for 30 min cycling repeated 5 times. At the room temperature for 1h prior to measurement.		
Vibration	Subject the device to vibration for 2h each in x, y and z axis with the amplitude of 1.5mm. Frequency shall vary uniformly between the limits of 10Hz~55Hz.		
Soldering Test	Lead terminals are heated up to $350^{\circ}\text{C}\pm 10^{\circ}\text{C}$ for $5\text{s}\pm 0.5\text{s}$ with brand iron and then element shall be measured after being placed in natural conditions for 1 h. No visible damage and it shall fulfill the specifications in Table 1		
Solder-ability	Lead terminals are immersed in soldering bath of $260^{\circ}\text{C}\sim 290^{\circ}\text{C}$ for $3\text{s}\pm 0.5\text{s}$ . More than 95% of the terminal surface of the device shall be covered with fresh solder.		The terminals shall be at least 95% covered by solder.
Terminal Pressure Strength	Force of 2kg is applied to each lead in axial direction for $10\text{s}\pm 1\text{s}$ (see drawing). No visible damage and it shall fulfill the specifications in Fig 1		Mechanical damage such as breaks shall not occur.



Fig. 1

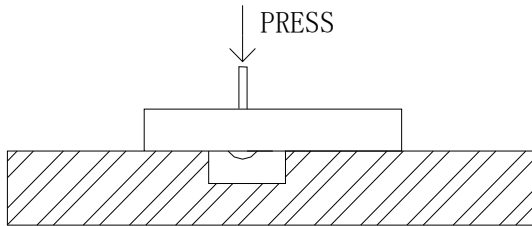


Table 1

Item	Specification After Test (MHz)
Center Frequency Change	±2.0

### Caution of use

1. Do not apply excess mechanical stress to the component and terminals at soldering.
2. The component may be damaged when excess stress is applied.
3. This specification is based on the quality of the component as a single unit. Thoroughly evaluate the component in your application circuit.