



REV A January 2011


Oscilent Controlled Document

Ordering Code / Part Number	Product Description
813-IF255.0M-29C	255.0 MHz IF SAW Filter 29.18 MHz Bandwidth

### Specification Contents

- o Mechanical Dimensions
- o Test Circuit
- o Maximum Ratings
- o Electrical Specification
- o Frequency Response
- o Smith Chart
- o VSWR

### Notes

- o Electrostatic Sensitive Device (ESD) 
- o Avoid excessive ultrasonic exposure
- o Solderability compatible with JEDEC J-STD-020C Pb-free process, 260°C peak reflow temperature
- o This product complies with EU directive 2002/95/EC (RoHS compliance)






## Mechanical Dimensions (mm)



Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

## Test Circuit

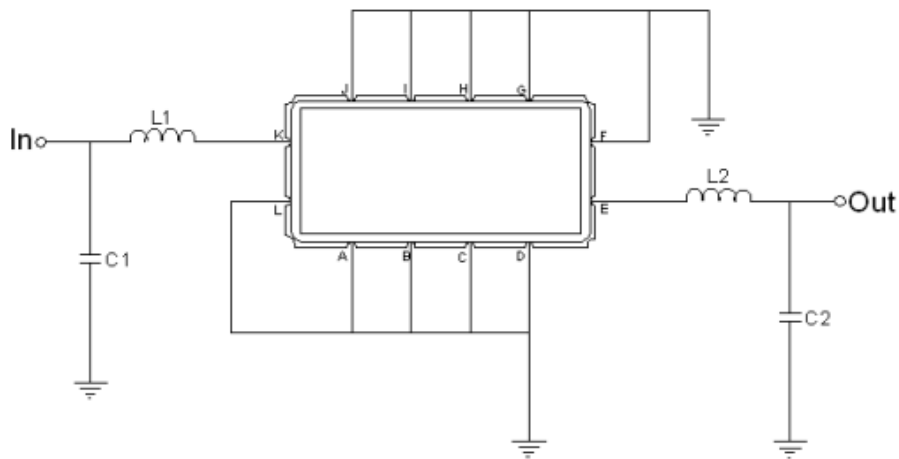

Test Fixture & Values	
Input	L1 = 15 nH, C1 = 56pF
Output	L2 = 15 nH, C2 = 36 pF
Source/Load Impedance	50 Ω



## Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-20	-	70
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-

Notes: With Matching Network (Ref. Testing Environment Circuit as shown above).

Those impedances could be modified with different impedance values and/or structures, if necessary.


## Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	255.0	-
Insertion Loss at Fo	dB	-	31.6	33.5
Group Delay Variation at Fo ± 14.32 MHz	nsec	-	31	70
Absolute Delay at Fo	usec	-	2.08	-
Passband Ripple Variation at Fo ± 14.32 MHz	dB	-	0.74	1.1
Bandwidth at -1dB	MHz	29.05	29.18	-
Bandwidth at -3dB	MHz	-	29.72	-
Bandwidth at -40dB	MHz	-	31.84	32.00
Ultimate Rejection	dB	47	53	-
Temperature Coefficient	ppm/°C	-	-72	-




### Frequency Response (Room Temp 25°C)


#### Bandwidth at -1.0 dB

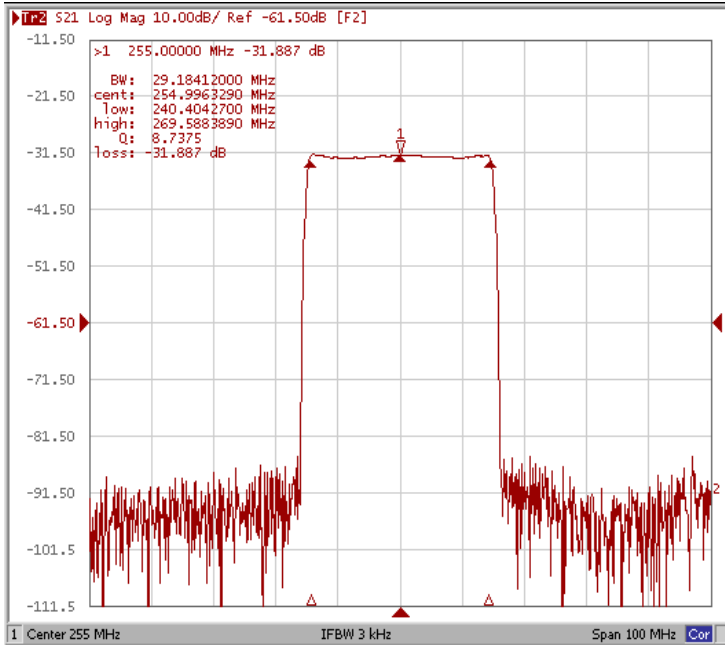


#### Bandwidth at -3.0 dB

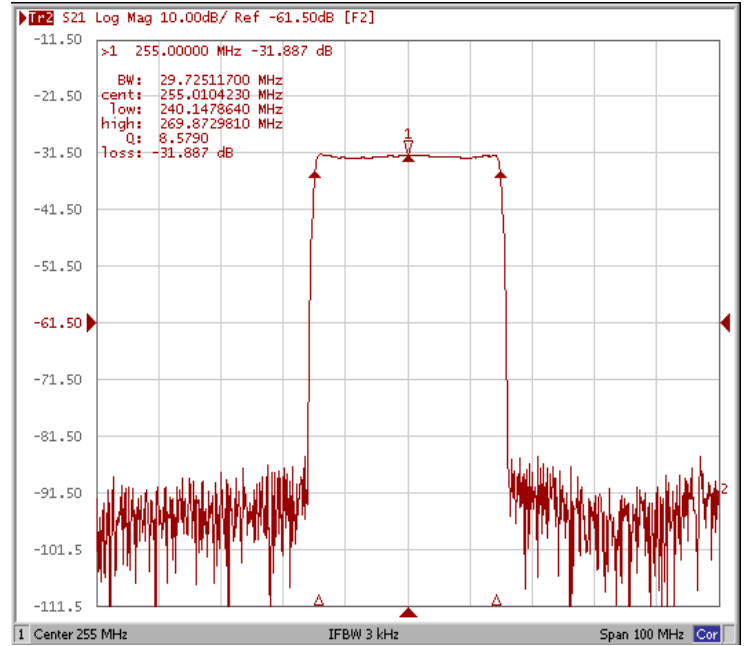

#### Bandwidth at -40 dB

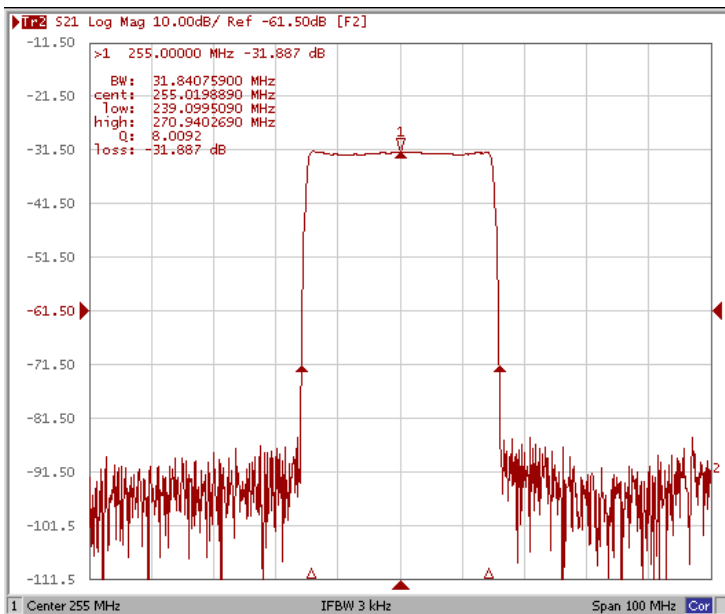


#### Bandwidth at -50 dB

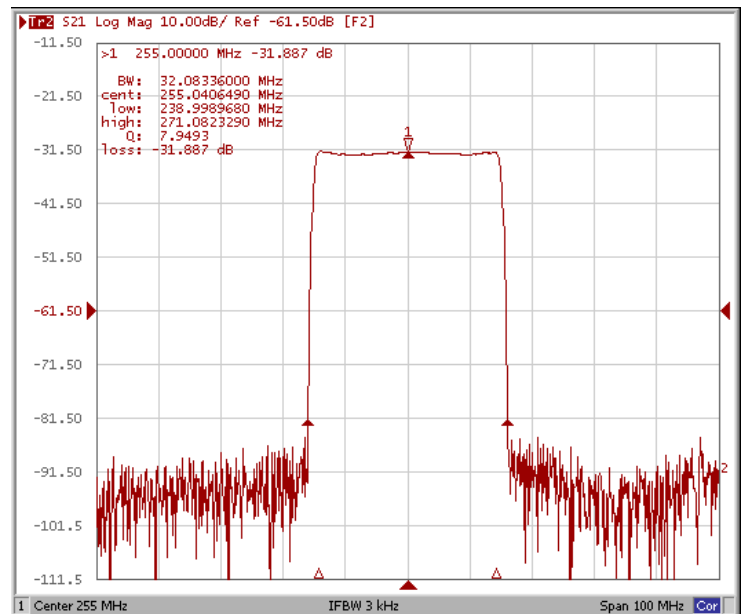





### Ripple Variation Fo±14.32 MHz

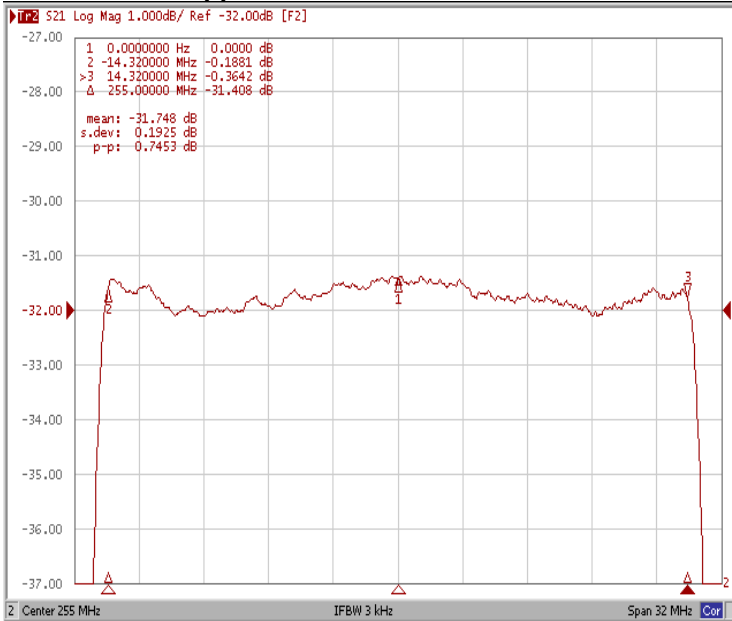

### Group Delay Variation Fo±14.32 MHz

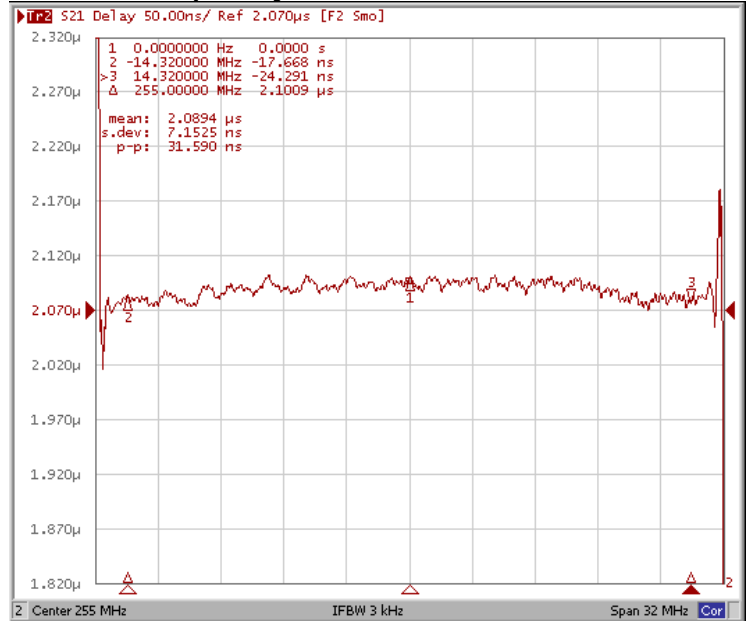

### Smith Chart

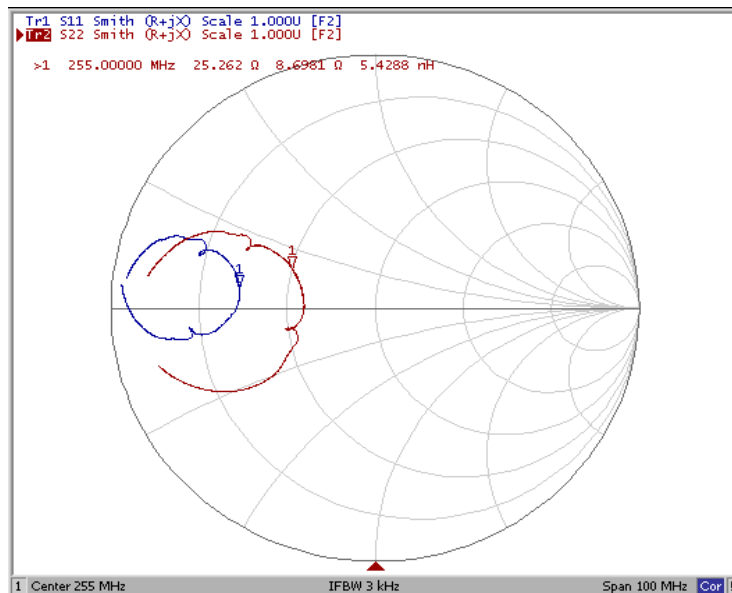



### VSWR

