



PRODUCT SPECIFICATION

REV A January 2011

Oscilent Controlled Document

Ordering Code / Part Number	Product Description
813-SL50.0M-20A	50.0 MHz IF SAW Filter 20.04 MHz Bandwidth

Specification Contents

- o Mechanical Dimensions
- o Test Circuit
- o Maximum Ratings
- o Electrical Specification
- o Frequency Response
- o Smith Chart
- o VSWR

Notes

- o Electrostatic Sensitive Device (ESD) 
- o Avoid excessive ultrasonic exposure
- o Solderability compatible with JEDEC J-STD-020C Pb-free process, 260°C peak reflow temperature
- o This product complies with EU directive 2002/95/EC (RoHS compliance)






Mechanical Dimensions (mm)



Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Test Circuit

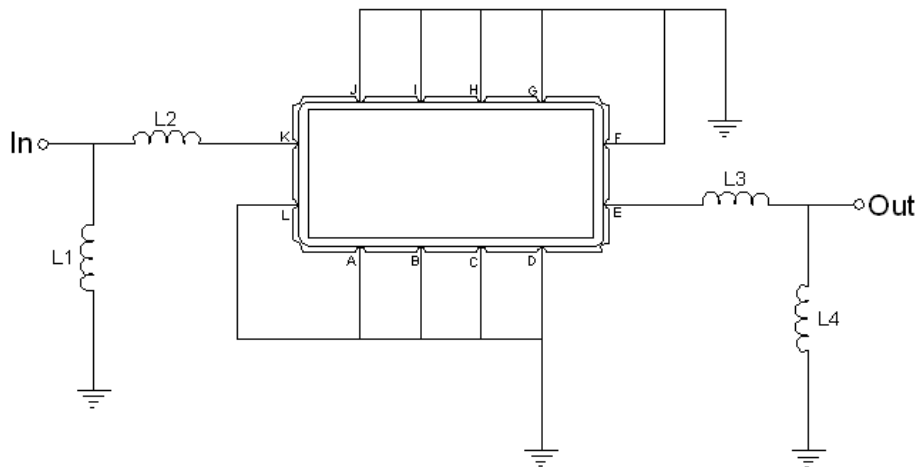

Test Fixture & Values	
Input	L1 = 560nH, L2 = 220nH
Output	L3 = 180nH, L4 = 560nH
Source/Load Impedance	50 Ω



Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-	25	-
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-

Notes: With Matching Network (Ref. Testing Environment Circuit as shown above).

Those impedances could be modified with different impedance values and/or structures, if necessary.


Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	50.0	-
Insertion Loss at Fo	dB	-	15.5	18.0
Group Delay Variation at Fo ± 9.22 MHz	nsec	-	26	50
Absolute Delay at Fo	usec	-	1.0	1.2
Passband Ripple Variation at Fo ± 9.22 MHz	dB	-	0.4	0.9
Bandwidth at -1dB	MHz	19.70	20.04	-
Bandwidth at -3dB	MHz	-	21.08	-
Bandwidth at -40dB	MHz	-	25.22	26.60
Ultimate Rejection	dB	-	42	-
Temperature Coefficient	ppm/°C	-	-86	-




Frequency Response


Bandwidth at -1.0 dB

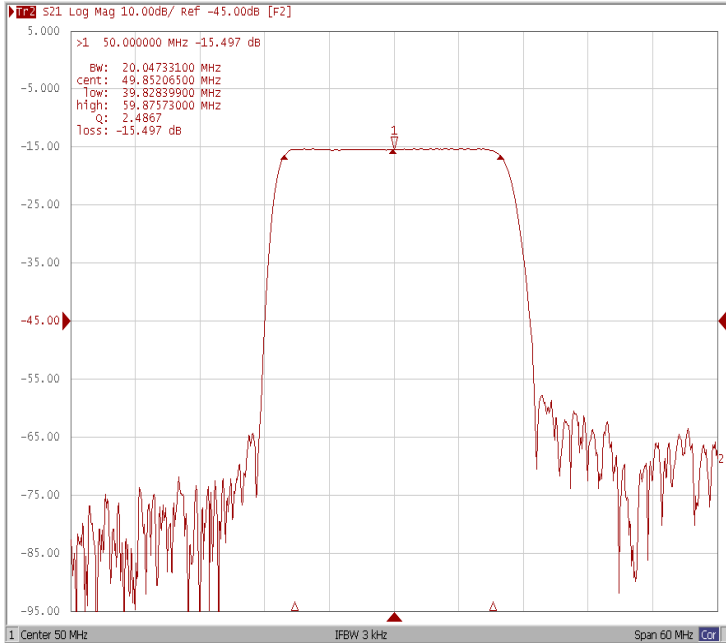


Bandwidth at -3.0 dB

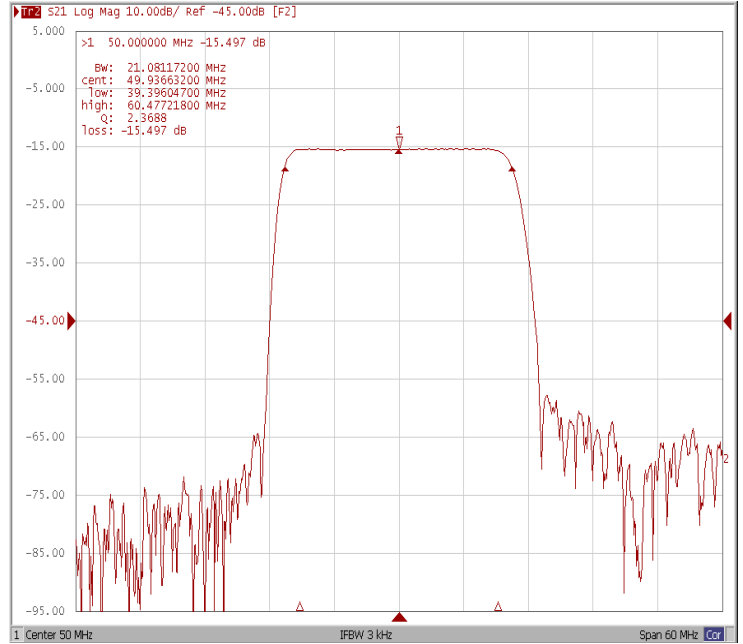

Bandwidth at -30 dB

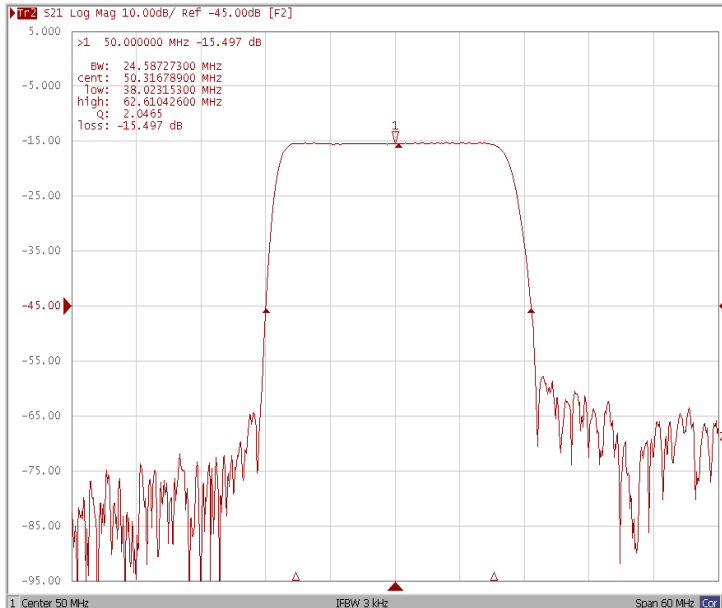


Bandwidth at -40 dB

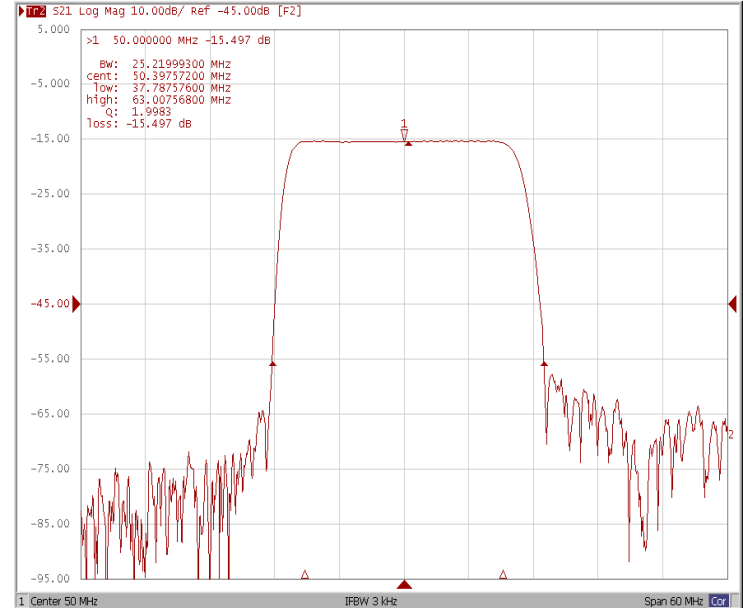





Ripple Variation Fo±9.22MHz

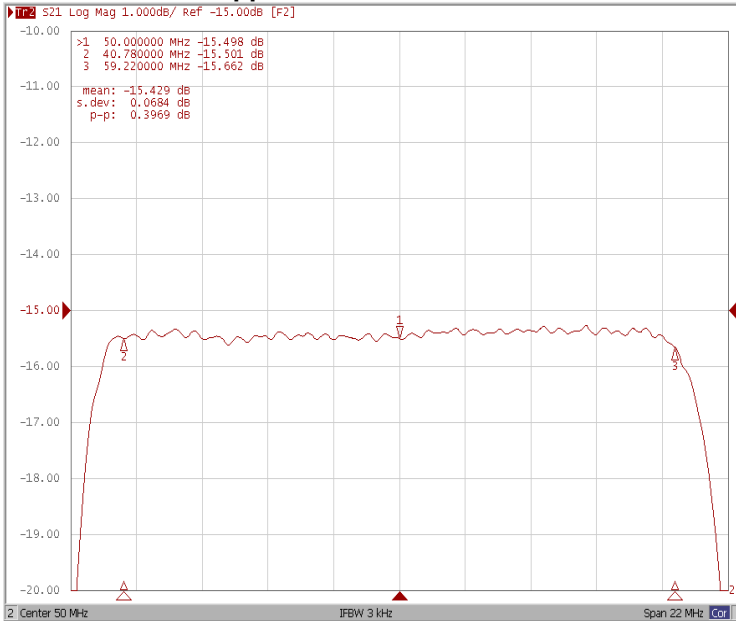

Group Delay Variation Fo±9.22MHz

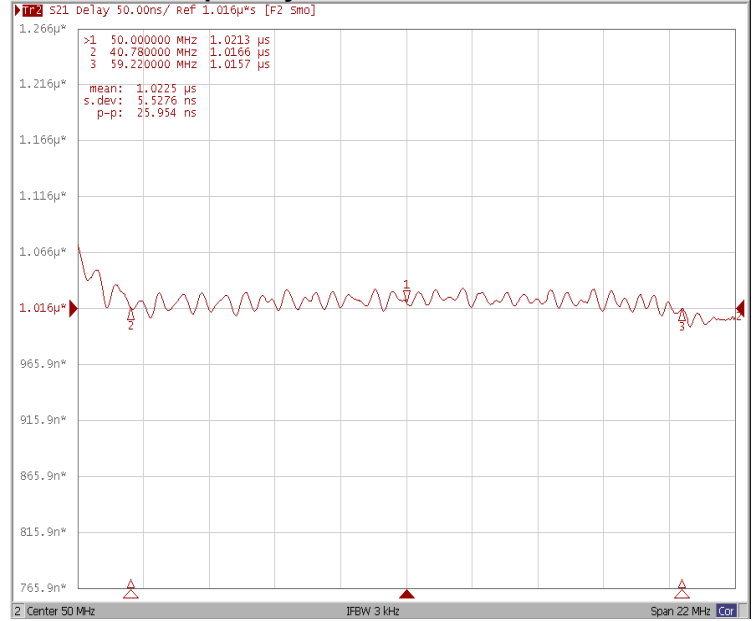

Smith Chart

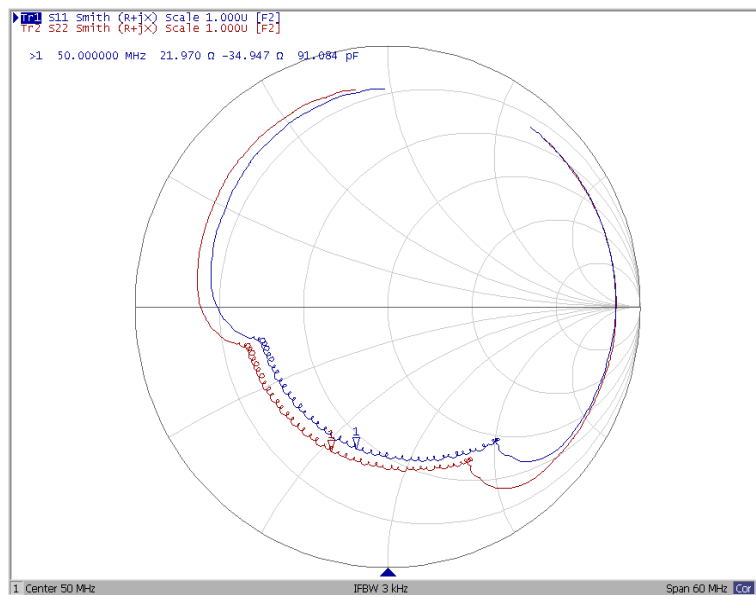



VSWR

