



# PRODUCT SPECIFICATION

REV A January 2011

Oscilent Controlled Document

Ordering Code / Part Number	Product Description
821-IF160.0M-16A	60.0 MHz IF SAW Filter 16.25 MHz Bandwidth

## Specification Contents

- o Mechanical Dimensions
- o Test Circuit
- o Maximum Ratings
- o Electrical Specification
- o Frequency Response
- o Smith Chart
- o VSWR


## Notes

- o Electrostatic Sensitive Device (ESD) 
- o Avoid excessive ultrasonic exposure
- o Solderability compatible with JEDEC J-STD-020C Pb-free process, 260°C peak reflow temperature
- o This product complies with EU directive 2002/95/EC (RoHS compliance)






## Mechanical Dimensions (mm)

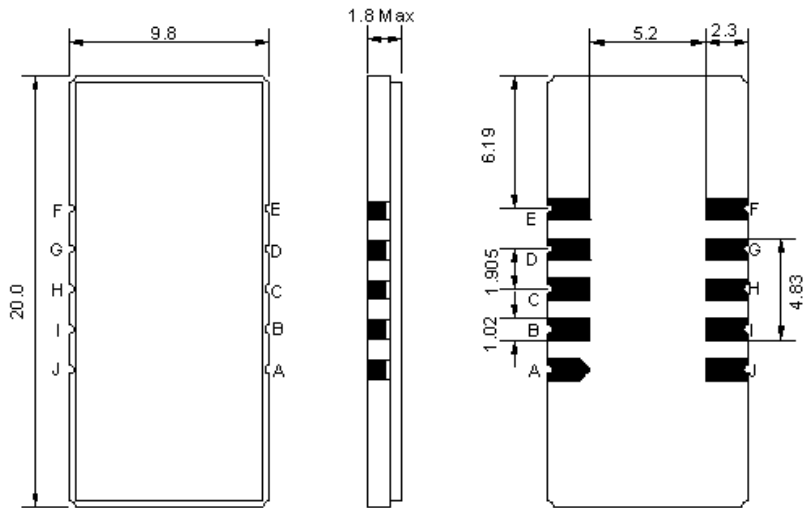

Pin Description	
A, B, C, D, F, G, H, I	Ground
J	Input
E	Output

## Test Circuit

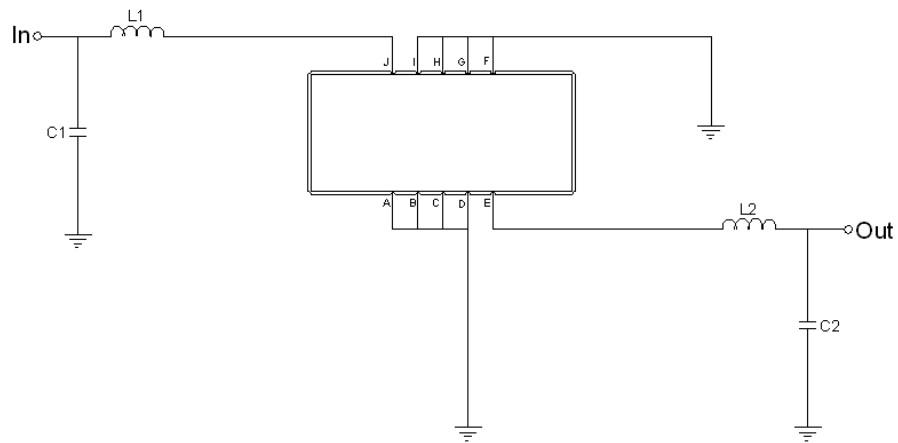

Test Fixture & Values	
Input	L1=27nH, C1=15pF
Output	L2=27nH, C2=12pF
Source/Load Impedance	50 Ω



## Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-5	-	80
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-

Notes: With Matching Network (Ref. Testing Environment Circuit as shown above).

Those impedances could be modified with different impedance values and/or structures, if necessary.


## Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	160.0	-
Insertion Loss at Fo	dB	-	22.70	24.50
Group Delay Variation (Fo±7.5MHz)	nsec	-	65	100
Absolute Delay	usec	-	2.32	2.50
Passband Ripple (Fo±7.5MHz)	dB	-	0.72	1.00
Bandwidth at -1dB	MHz	16.10	16.25	-
Bandwidth at -3dB	MHz	-	16.55	-
Bandwidth at -40dB	MHz	-	17.84	18.00
Bandwidth at -50dB	MHz	-	17.96	18.30
Ultimate Rejection	dB	-	53	-
Temperature coefficient	ppm/°C	-	-72	-




### Frequency Response


#### Bandwidth at -1.0 dB

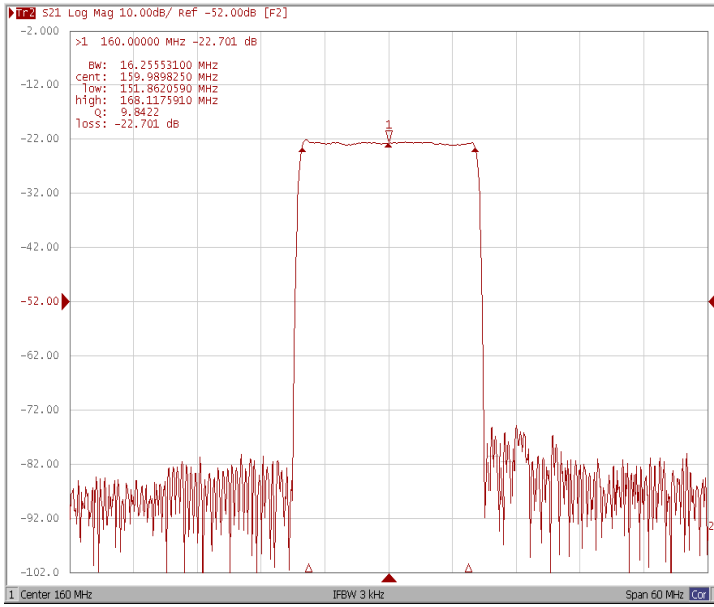


#### Bandwidth at -3.0 dB

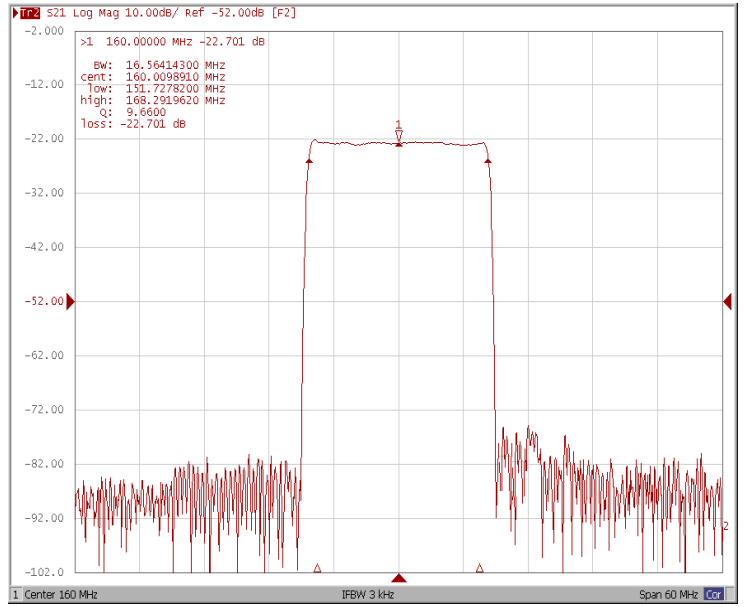

#### Bandwidth at -40.0 dB

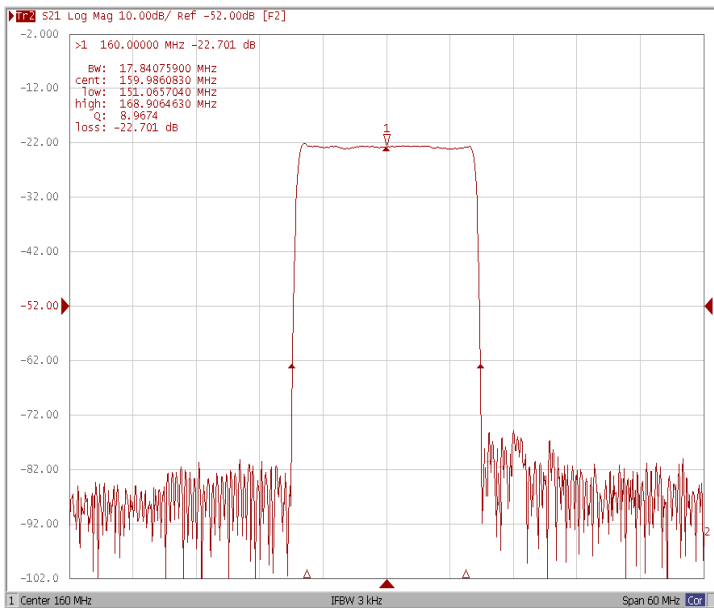


#### Bandwidth at -50.0 dB

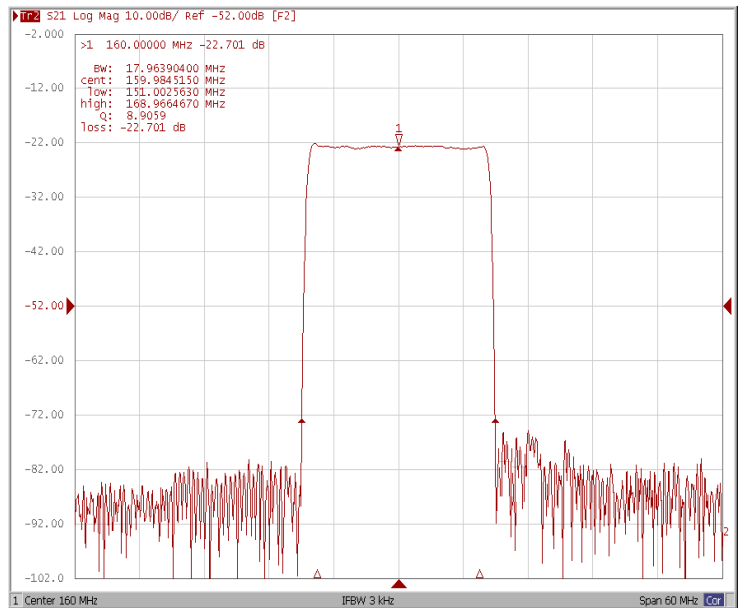





### Ripple Variation Fo±7.5MHz

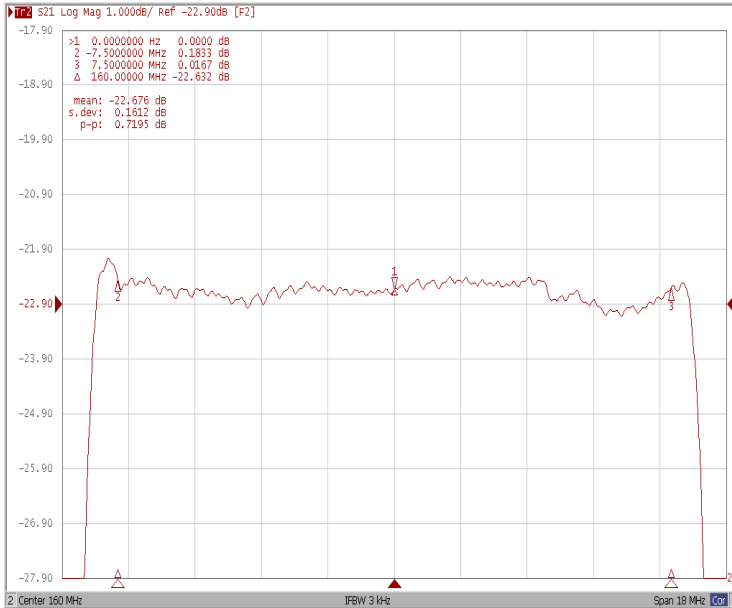

### Group Delay Variation Fo±7.5MHz

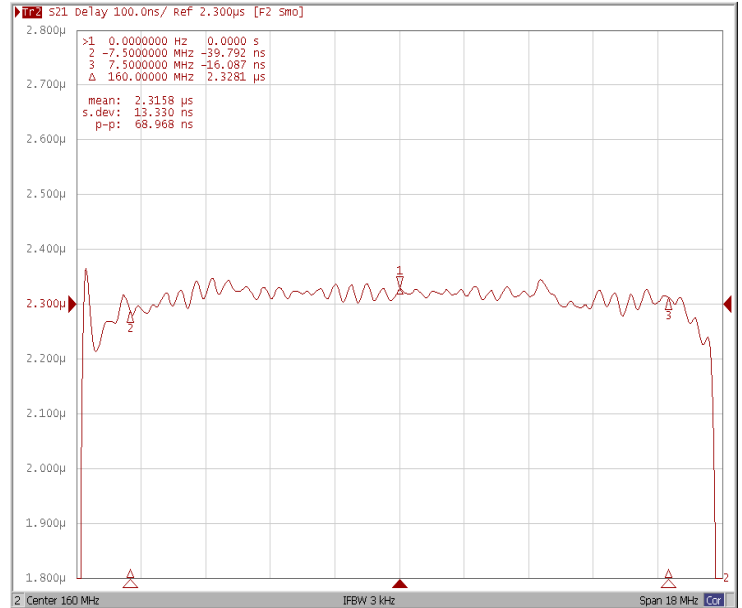

### Smith Chart

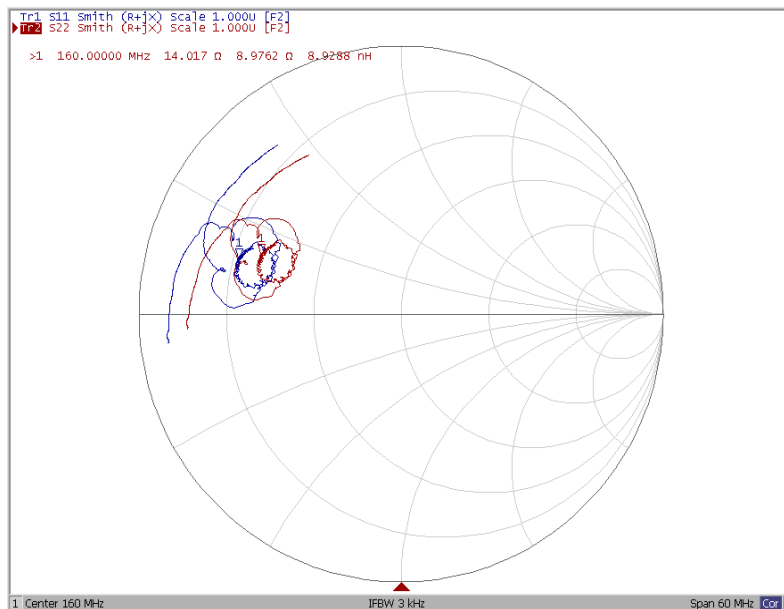



### VSWR

