



Oscilent Corporation

PRODUCT SPECIFICATION

REV A January 2011

Oscilent Controlled Document

Ordering Code / Part Number	Product Description
813-SL300.0M-02	300MHz IF SAW Filter 3.66MHz Bandwidth

Specification Contents

- o Mechanical Dimensions
- o Test Circuit
- o Maximum Ratings
- o Electrical Specification
- o Frequency Response

Notes

- o Electrostatic Sensitive Device (ESD) 
- o Avoid excessive ultrasonic exposure
- o Solderability compatible with JEDEC J-STD-020C Pb-free process, 260°C peak reflow temperature
- o This product complies with EU directive 2002/95/EC (RoHS compliance)






Mechanical Dimensions (mm)



Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Test Circuit

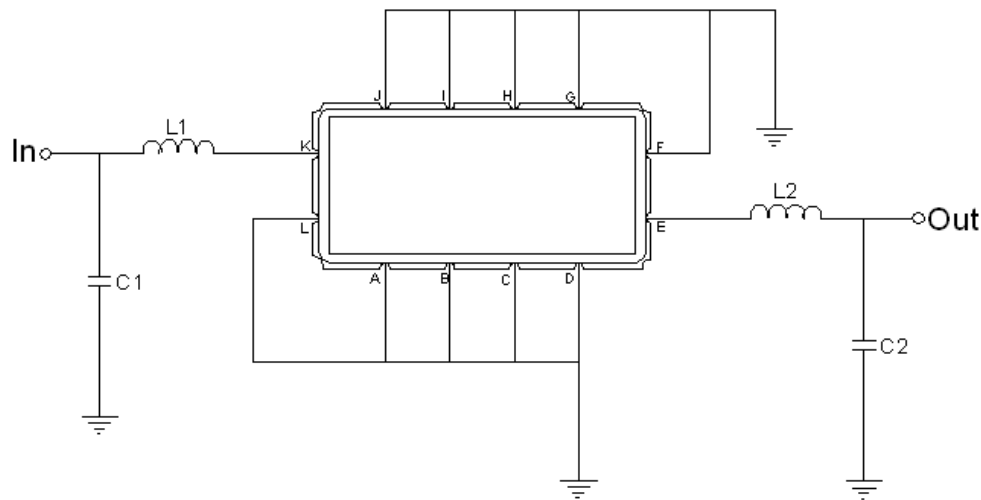

Test Fixture & Values	
Input	L1=55nH, C1=23pF
Output	L2=54nH, C2=23.3pF
Source/Load Impedance	50 Ω



Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-

Notes: With Matching Network (Ref. Testing Environment Circuit as shown above).

Those impedances could be modified with different impedance values and/or structures, if necessary.

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	300.0	-
Insertion Loss at Fo	dB	-	17.5	19.5
Temperature Coefficient	ppm/°C	-	-0.03	-
Amplitude Ripple Variation	dB _{p-p}	-	1.0	1.5
Group Delay Variation	nsec	-	150	200
Absolute Delay at Fo	µsec	-	0.509	1.2
Bandwidth at -1.0 dB	MHz	2.0	2.54	-
Bandwidth at -3.0 dB	MHz	3.0	3.66	-
Bandwidth at -40.0 dB	MHz	-	9.74	11.0
Relative Attenuation:				
Lower sidelobe	dB	50	55	-
Upper sidelobe	dB	50	55	-
Ambient Temperature	°C	-	25	-



Frequency Response

