



# PRODUCT SPECIFICATION

REV A January 2011

Oscilent Controlled Document

Ordering Code / Part Number	Product Description
821-IF65.0M-H	65.0MHz IF SAW Filter 10.0MHz Bandwidth

## Specification Contents

- o Mechanical Dimensions
- o Test Circuit
- o Maximum Ratings
- o Electrical Specification
- o Frequency Response


## Notes

- o Electrostatic Sensitive Device (ESD) 
- o Avoid excessive ultrasonic exposure
- o Solderability compatible with JEDEC J-STD-020C Pb-free process, 260°C peak reflow temperature
- o This product complies with EU directive 2002/95/EC (RoHS compliance)






**Mechanical Dimensions (mm)**

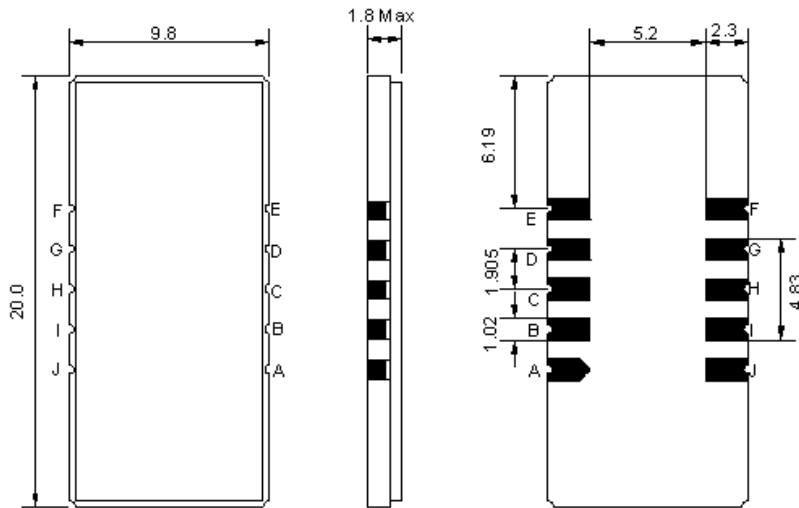

Pin Description	
A, B, C, D, F, G, H, I	Ground
J	Input
E	Output

**Test Circuit**

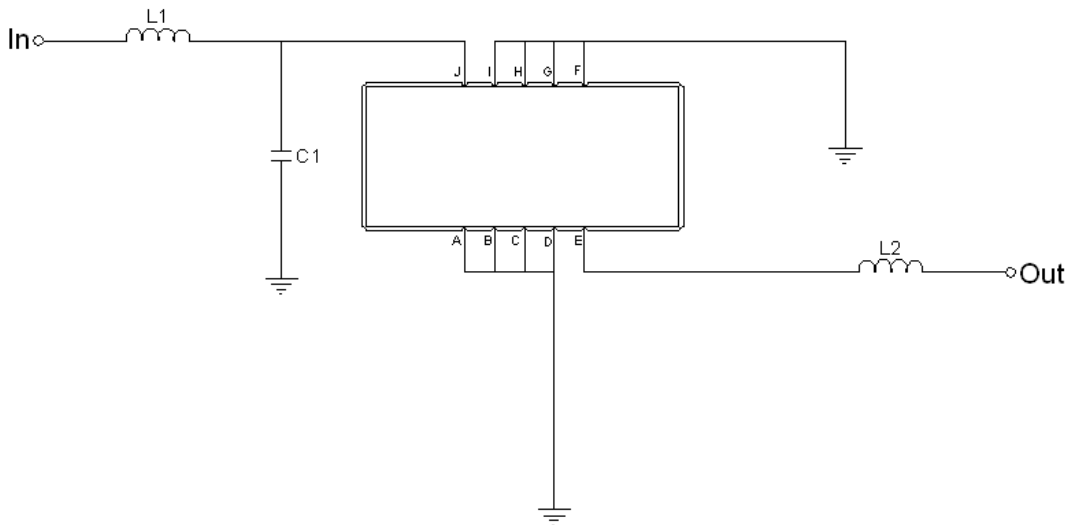

Test Fixture & Values	
Input	L1=68nH, C1=24pF
Output	L2=120nH
Source/Load Impedance	50 Ω



## Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	-	80
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	Ω	-	50	-

Notes: With Matching Network (Ref. Testing Environment Circuit as shown above).  
Those impedances could be modified with different impedance values and/or structures, if necessary.

## Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	65.0	-
Insertion Loss at Fo	dB	-	18.5	20.5
Amplitude Ripple Variation at Fo ±9.75 MHz	dB <sub>p-p</sub>	-	0.65	1.0
Group Delay Variation	nsec	-	45	100
Absolute Delay at Fo	μsec	-	1.67	-
Temperature Coefficient	ppm/°C	-	-72	-
Bandwidth at -1.0 dB	MHz	9.8	10.00	-
Bandwidth at -3.0 dB	MHz	10.3	10.52	-
Bandwidth at -40.0 dB	MHz	-	12.63	12.8
Bandwidth at -50.0 dB	dB	-	12.82	13.0
Ultimate Rejection	dB	50	55	-



## Frequency Response

