



PRODUCT SPECIFICATION

REV A January 2010

Oscilent Controlled Document

Ordering Code / Part Number	Product Description
802-RF463.75M-C	CDMA 450 A+C Band, RF-Rx SAW Filter

Specification Contents

- o Mechanical Dimensions
- o Test Circuit
- o Maximum Ratings
- o Electrical Specification
- o Frequency Performance
- o VSWR
- o Smith Chart


Notes

- o Electrostatic Sensitive Device (ESD) 
- o Avoid excessive ultrasonic exposure
- o Solderability compatible with JEDEC J-STD-020C Pb-free process, 260°C peak reflow temperature
- o This product complies with EU directive 2002/95/EC (RoHS compliance)







Mechanical Dimensions (mm)

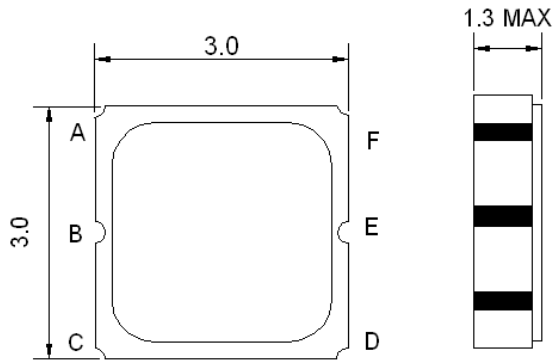

Pin Description	
A, C, D, F	Ground
E	In or Out
B	Out or In

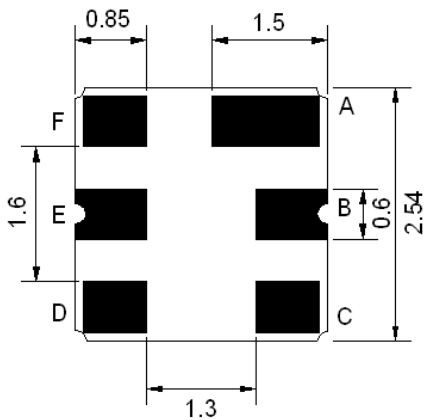

Test Circuit

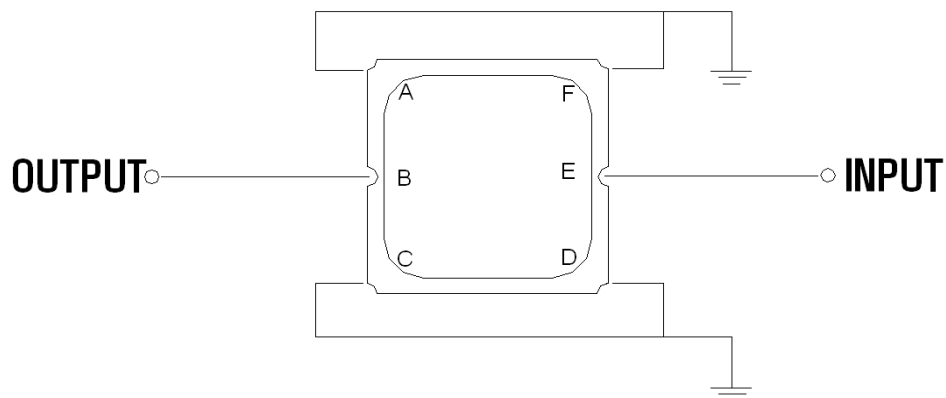

Source and Load Impedance: 50 Ω

**Maximum Ratings**

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	25
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-



Notes: No Matching Network (Ref. Testing Environment Circuit as shown above).

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	463.75	-
Insertion Loss within 460.0 ~ 467.5 MHz	dB	-	2.0	3.5
Attenuation:				
0.3 ~ 450.0 MHz	dB	37	43	-
450.0 ~ 455.0 MHz	dB	35	45	-
455.0 ~ 457.5 MHz	dB	2	7	-
480.0 ~ 520.0 MHz	dB	35	40	-
520.0 ~ 1000.0 MHz	dB	35	43	-
1000.0 ~ 2000.0 MHz	dB	30	35	-
VSWR within 460.0 ~ 467.5MHz	-	-	1.7	2.3





Frequency Performance

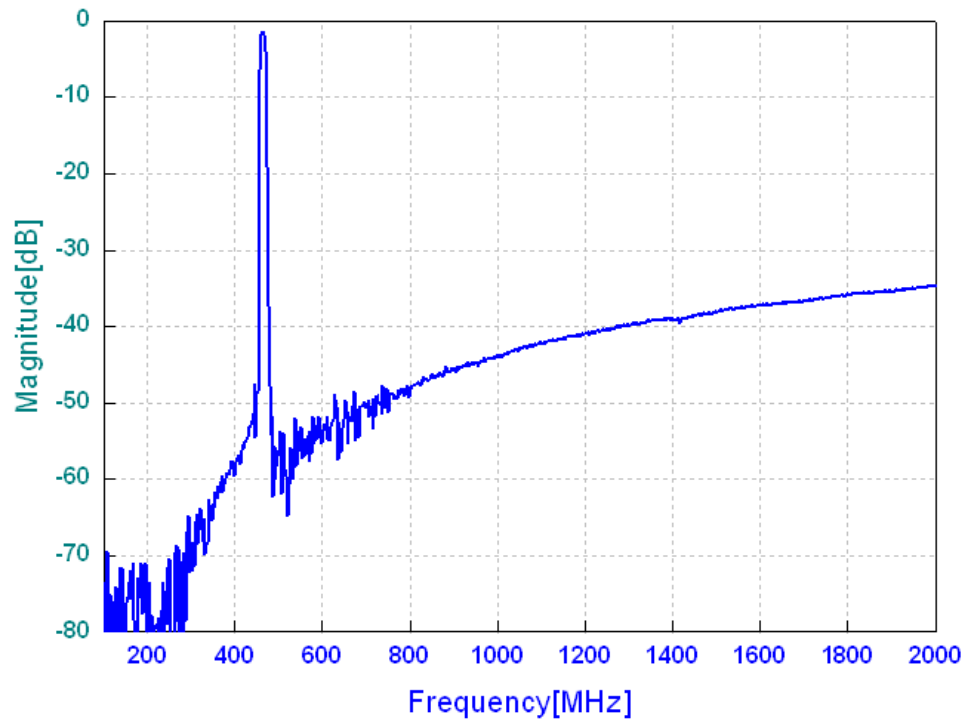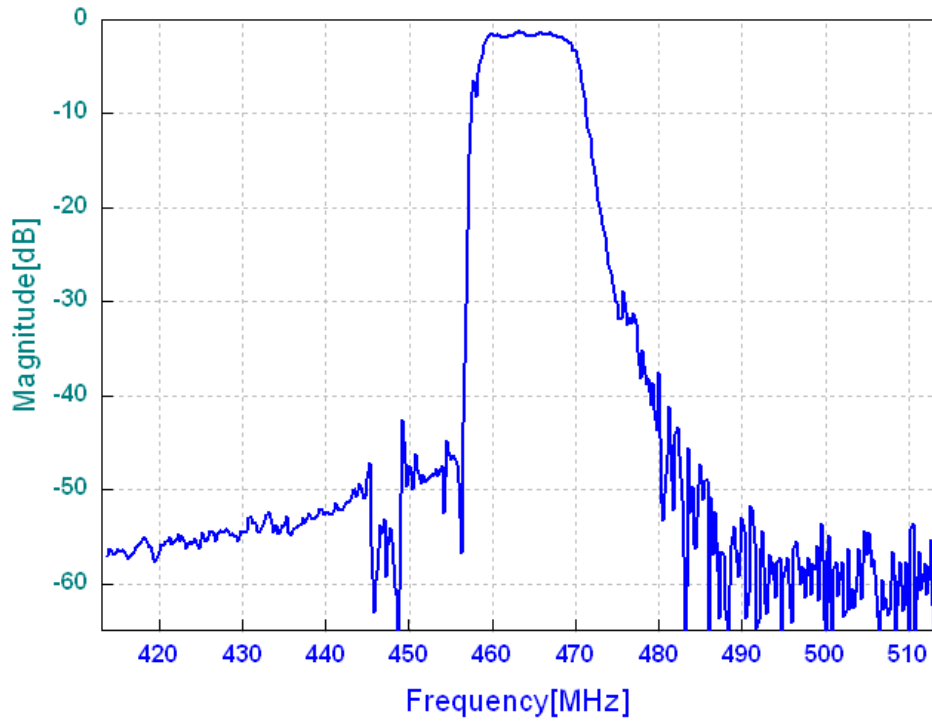



VSWR

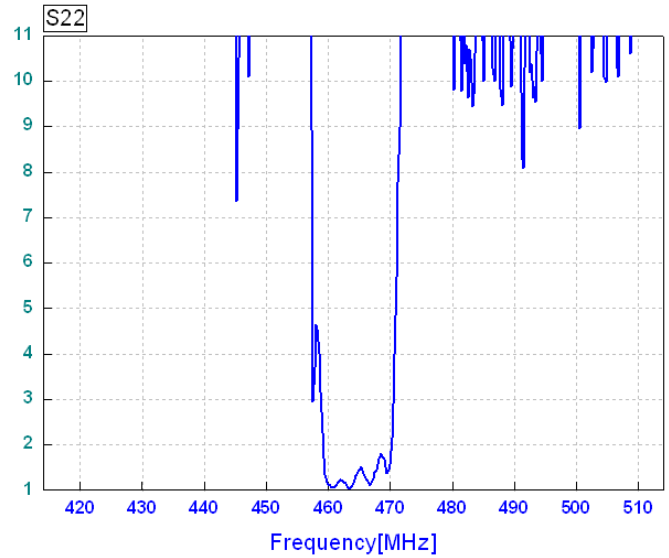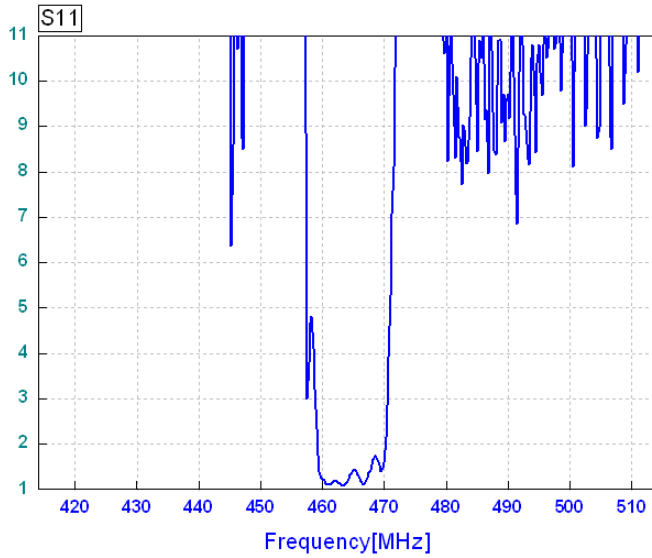

Smith Chart

