



PRODUCT SPECIFICATION

REV A January 2010

Oscilent Controlled Document

Ordering Code / Part Number	Product Description
805-RF268.5M-A	Wireless, RF SAW Filter

Specification Contents

- o Mechanical Dimensions
- o Test Circuit
- o Maximum Ratings
- o Electrical Specification
- o Frequency Performance


Notes

- o Electrostatic Sensitive Device (ESD) 
- o Avoid excessive ultrasonic exposure
- o Solderability compatible with JEDEC J-STD-020C Pb-free process, 260°C peak reflow temperature
- o This product complies with EU directive 2002/95/EC (RoHS compliance)






Mechanical Dimensions (mm)

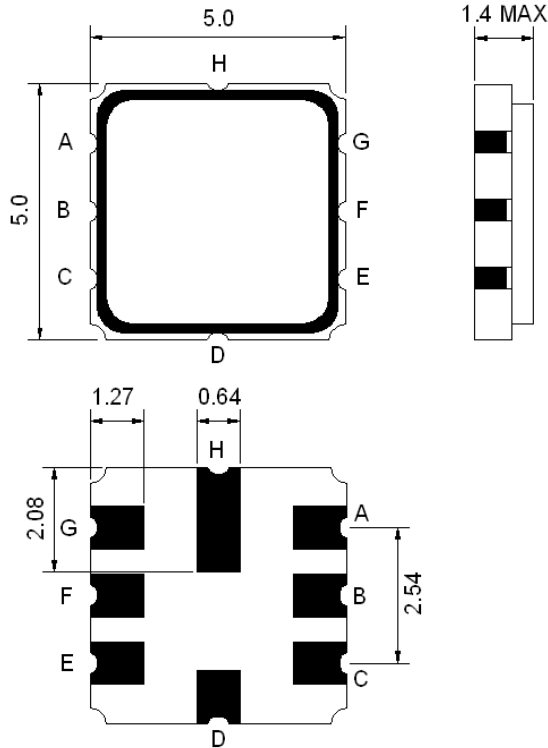

Pin Description	
A, C, D, E, G, H	Ground
B	In
F	Out

Test Circuit

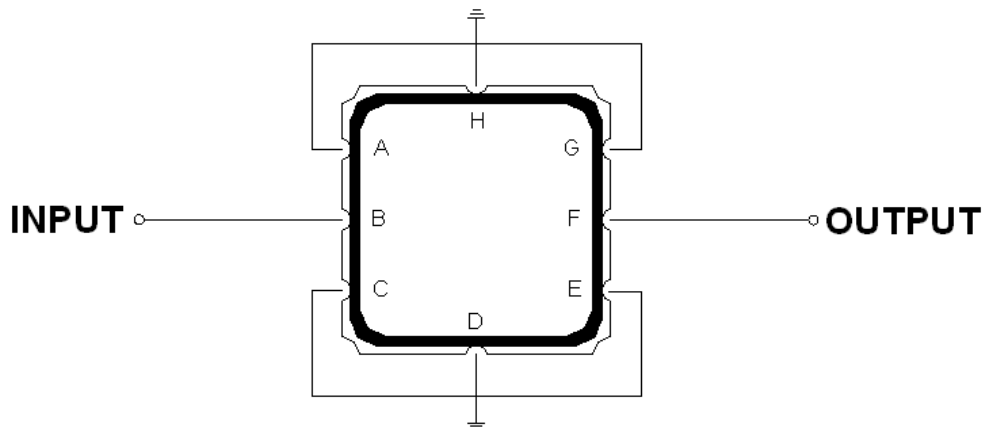

Source and Load Impedance: 50 Ω



Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-20	-	+55
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	3
Maximum Input Power	dBm	-	-	25
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-



Notes: No Matching Network

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	268.5	-
Insertion Loss within 266.0 ~ 271.0 MHz	dB	-	1.9	3.0
Stop Band Attenuation:				
10.0 ~ 260.0 MHz	dB	35	45	-
260.0 ~ 263.0 MHz	dB	30	40	-
277.0 ~ 284.0 MHz	dB	25	35	-
284.0 ~ 300.0 MHz	dB	40	50	-
300.0 ~ 1000.0 MHz	dB	30	44	-
VSWR within 266.0 ~ 271.0 MHz	-	-	1.6	2.4



Frequency Performance

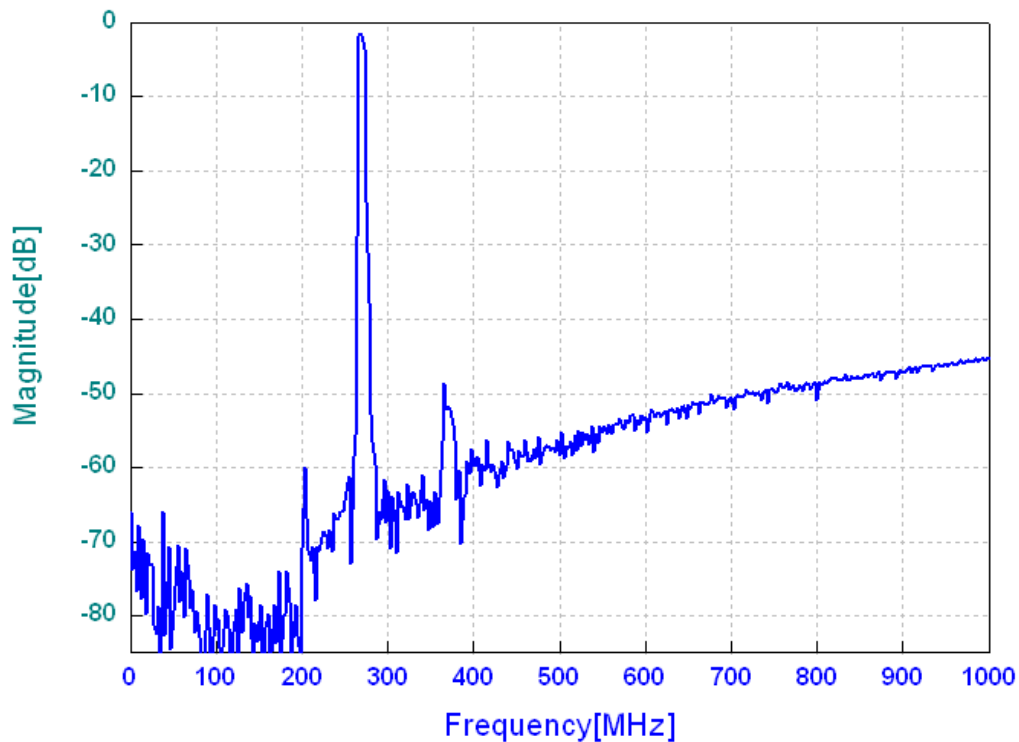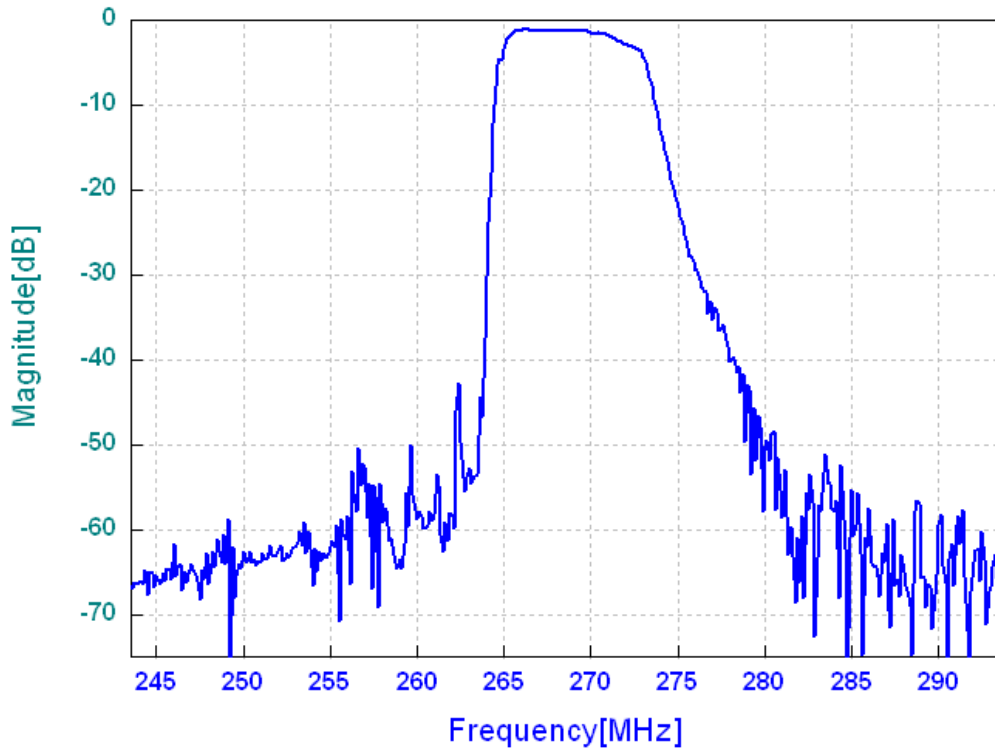





January 2010 Rev A

Oscilent Part Number
805-RF268.5M-A

Wireless, RF SAW Filter

VSWR

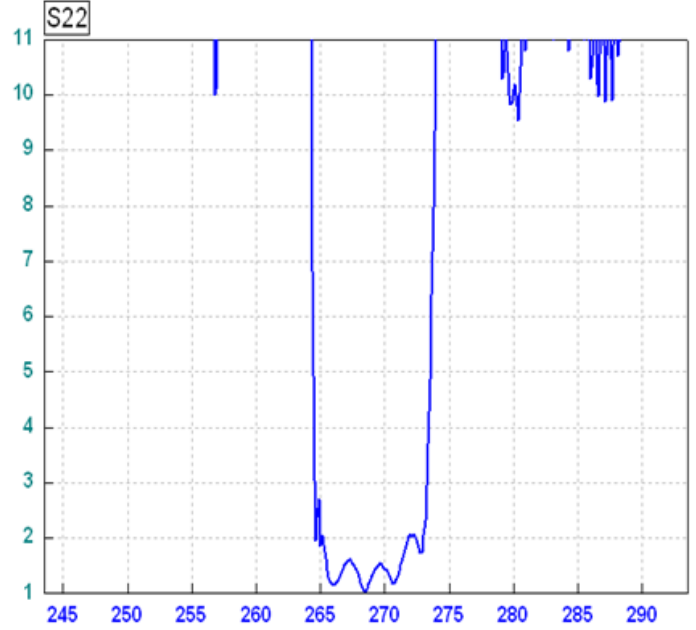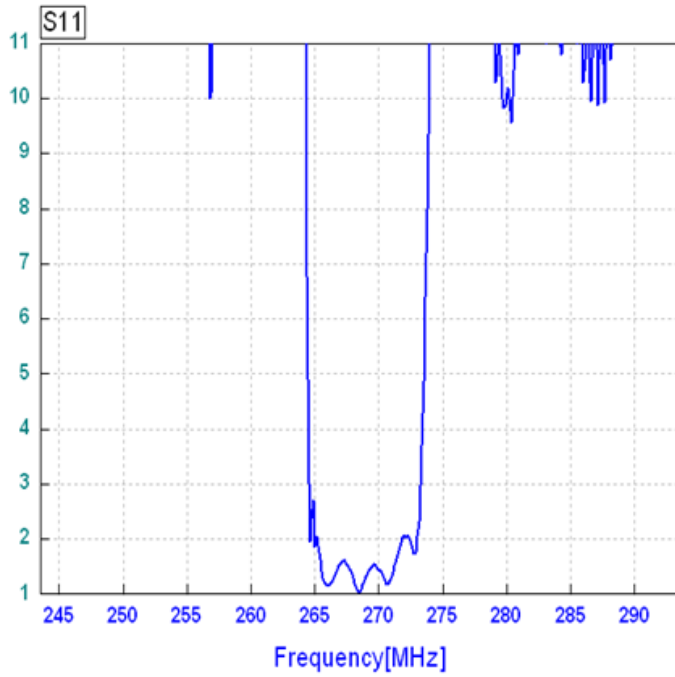

Smith Chart

