



PRODUCT SPECIFICATION

REV A January 2010


Oscilent Controlled Document

Ordering Code / Part Number	Product Description
801-RF881.5M-D	CDMA, RF-Rx SAW Filter

Specification Contents

- o Mechanical Dimensions
- o Test Circuit
- o Maximum Ratings
- o Electrical Specification
- o Frequency Performance
- o VSWR
- o Smith Chart


Notes

- o Electrostatic Sensitive Device (ESD) 
- o Avoid excessive ultrasonic exposure
- o Solderability compatible with JEDEC J-STD-020C Pb-free process, 260°C peak reflow temperature
- o This product complies with EU directive 2002/95/EC (RoHS compliance)







Mechanical Dimensions (mm)

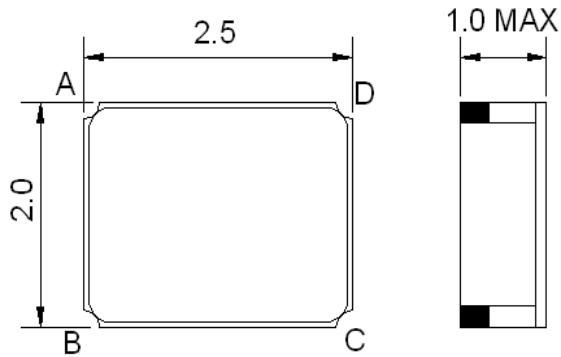

Pin Description	
A, C	Ground
B	In
D	Out

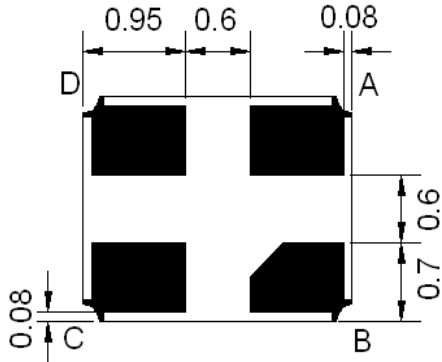

Test Circuit

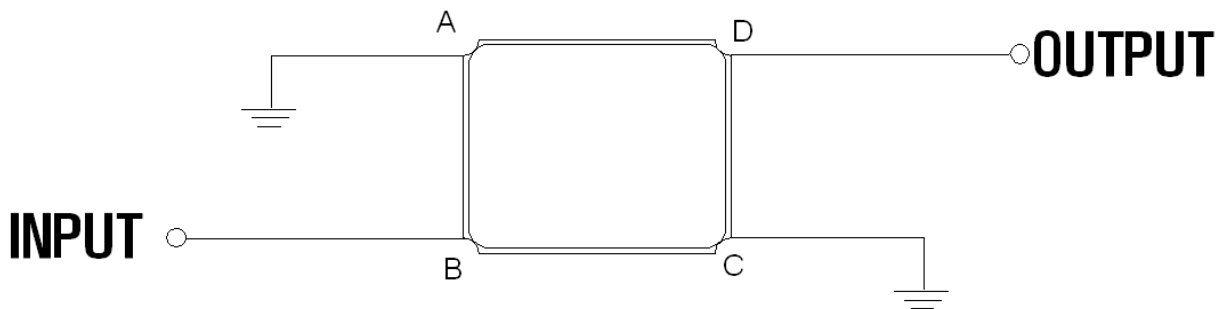

Source and Load Impedance: 50 Ω



Maximum Ratings

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	5
Maximum Input Power	dBm	-	-	15
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-



Notes: No Matching Network (Ref. Testing Environment Circuit as shown above).

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	881.5	-
Insertion Loss within 869~894MHz	dB	-	2.4	2.8
Amplitude Ripple within 869~894MHz	dB _{p-p}	-	0.65	1.2
Attenuation:				
D.C. ~ 840 MHz	dB	45	51	-
840 ~ 851 MHz	dB	40	45	-
914 ~ 924 MHz	dB	20	26	-
924 ~ 950 MHz	dB	34	39	-
950 ~ 997 MHz	dB	40	49	-
997 ~ 2200 MHz	dB	40	47	-
2200 ~ 3000 MHz	dB	27	30	-
VSWR within 869~894MHz	-	-	1.7	2.1





Frequency Performance

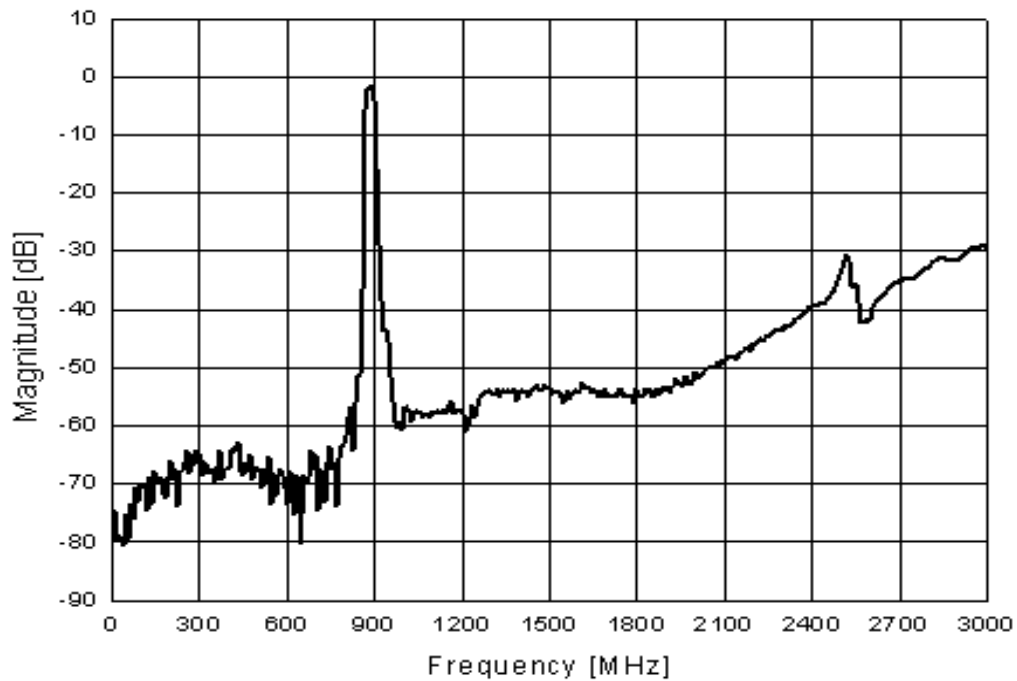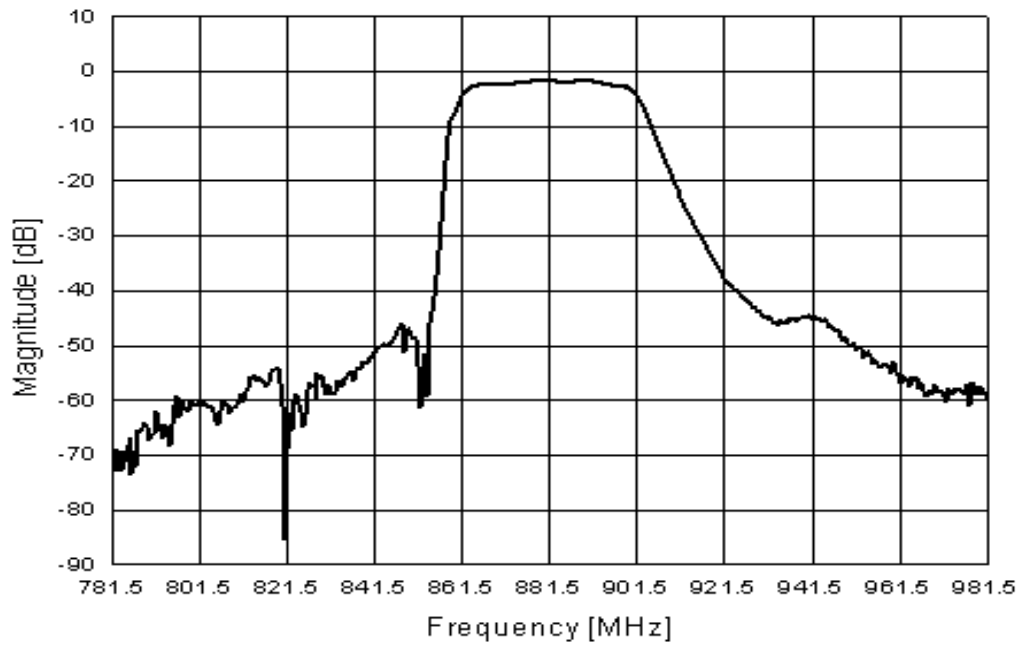



VSWR

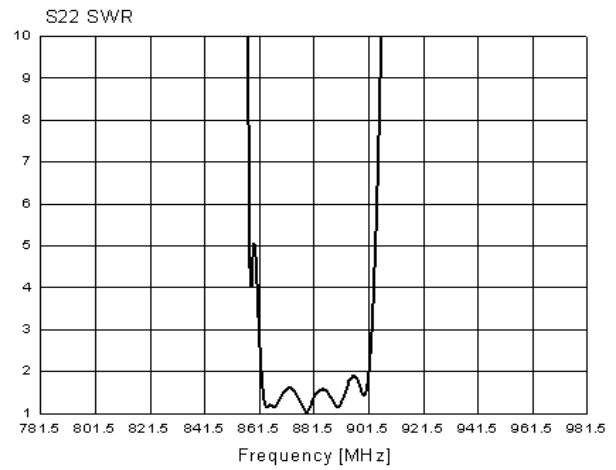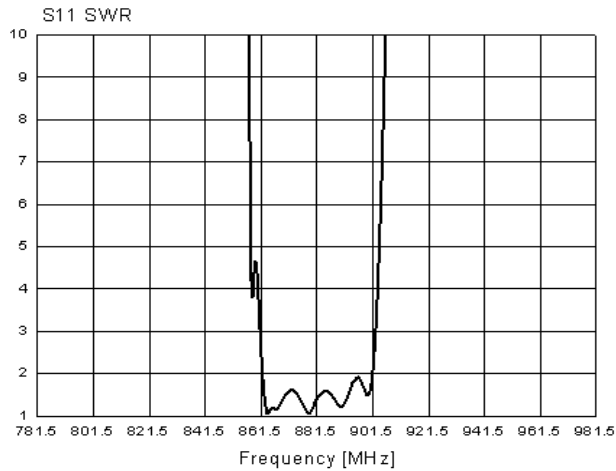

Smith Chart

