



PRODUCT SPECIFICATION

REV A January 2010


Oscilent Controlled Document

Ordering Code / Part Number	Product Description
802-RF2441.8M-A	Bluetooth, RF SAW Filter

Specification Contents

- o Mechanical Dimensions
- o Test Circuit
- o Maximum Ratings
- o Electrical Specification
- o Frequency Performance
- o VSWR
- o Smith Chart


Notes

- o Electrostatic Sensitive Device (ESD) 
- o Avoid excessive ultrasonic exposure
- o Solderability compatible with JEDEC J-STD-020C Pb-free process, 260°C peak reflow temperature
- o This product complies with EU directive 2002/95/EC (RoHS compliance)







Mechanical Dimensions (mm)

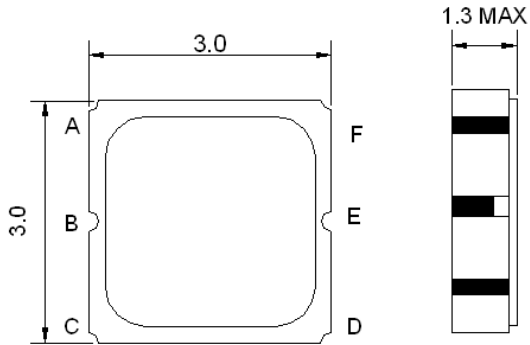

Pin Description	
A, C, D, F	Ground
E	In
B	Out

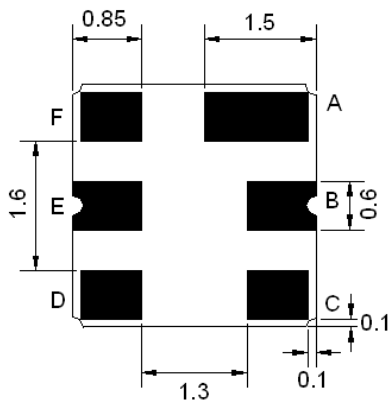

Test Circuit

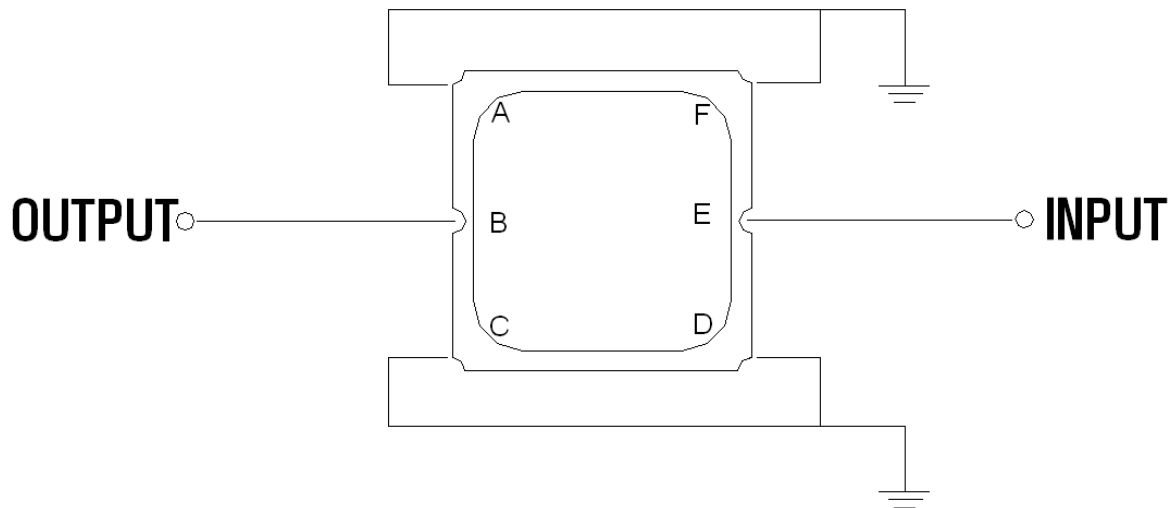

Source and Load Impedance: 50 Ω

**Maximum Ratings**

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	-
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-



Notes: No Matching Network (Ref. Testing Environment Circuit as shown above).

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	2441.8	-
Insertion Loss within 2400.0 ~ 2483.5 MHz	dB	-	2.5	5.0
Amplitude Ripple within 2400.0 ~ 2483.5 MHz	dB _{p-p}	-	1.2	3.0
Attenuation:				
D.C ~ 1700.0 MHz	dB	20	29	-
1700.0 ~ 2200.0 MHz	dB	25	30	-
2700.0 ~ 3100.0 MHz	dB	30	40	-
3100.0 ~ 4000.0 MHz	dB	20	29	-
4000.0 ~ 5000.0 MHz	dB	10	20	-
VSWR within 2400.0 ~ 2483.5 MHz	-	-	1.7	2.6





Frequency Performance

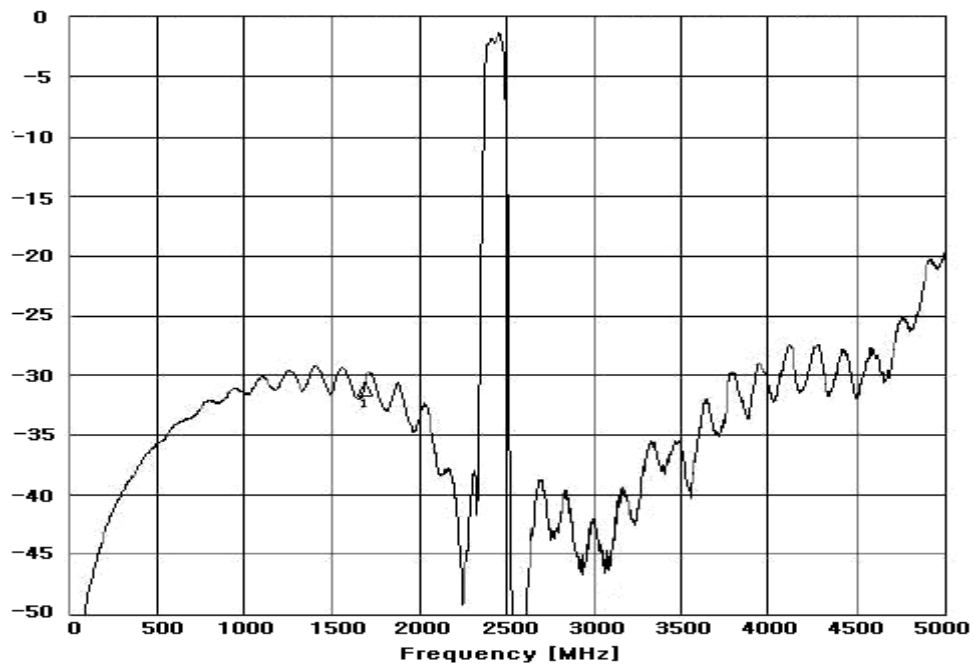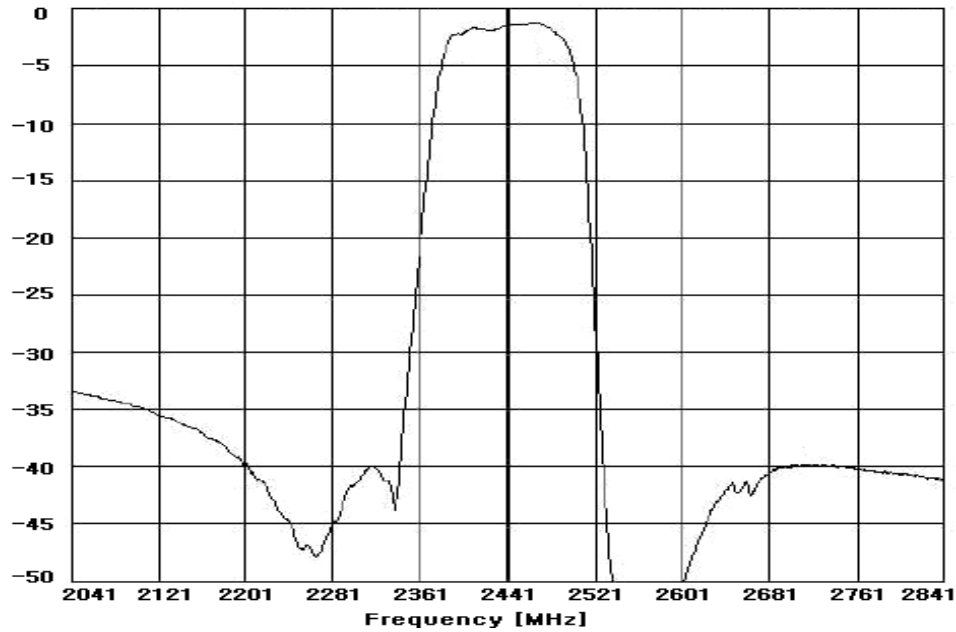



VSWR

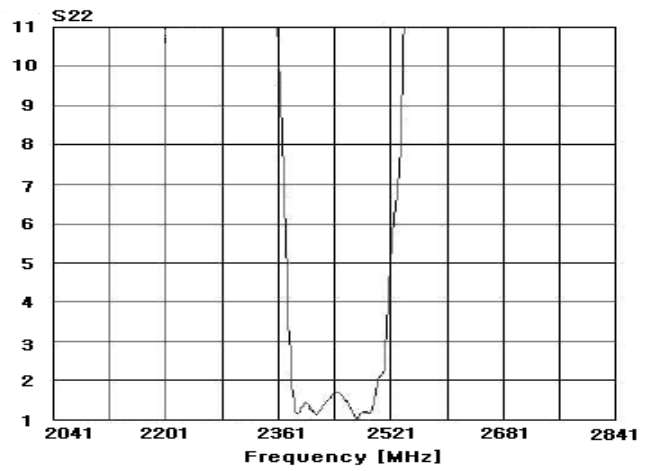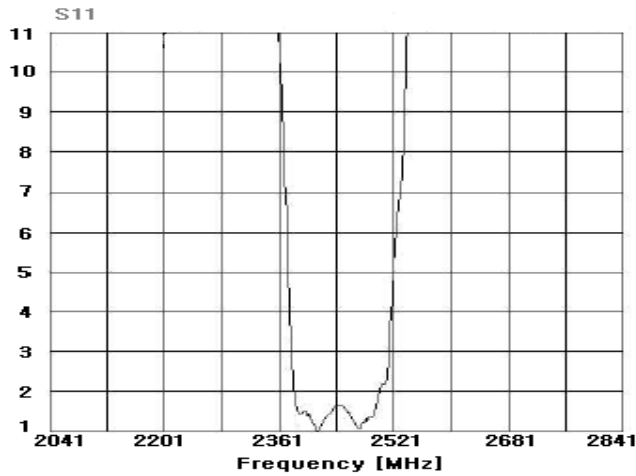

Smith Chart

