



# PRODUCT SPECIFICATION

REV A January 2010

Oscilent Controlled Document

Ordering Code / Part Number	Product Description
802-RF455.0M-A	CDMA 450 A-Band, RF-Tx SAW Filter

## Specification Contents

- o Mechanical Dimensions
- o Test Circuit
- o Maximum Ratings
- o Electrical Specification
- o Frequency Performance
- o VSWR
- o Smith Chart

## Notes

- o Electrostatic Sensitive Device (ESD) 
- o Avoid excessive ultrasonic exposure
- o Solderability compatible with JEDEC J-STD-020C Pb-free process, 260°C peak reflow temperature
- o This product complies with EU directive 2002/95/EC (RoHS compliance)







## Mechanical Dimensions (mm)



Pin Description	
A, C, D, F	Ground
E	In
B	Out

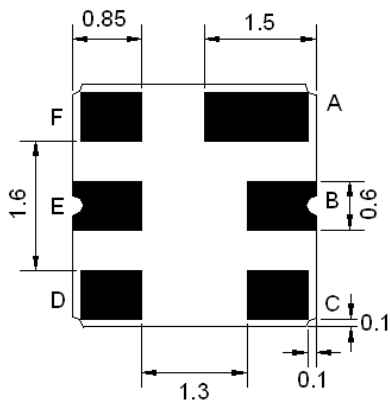

## Test Circuit

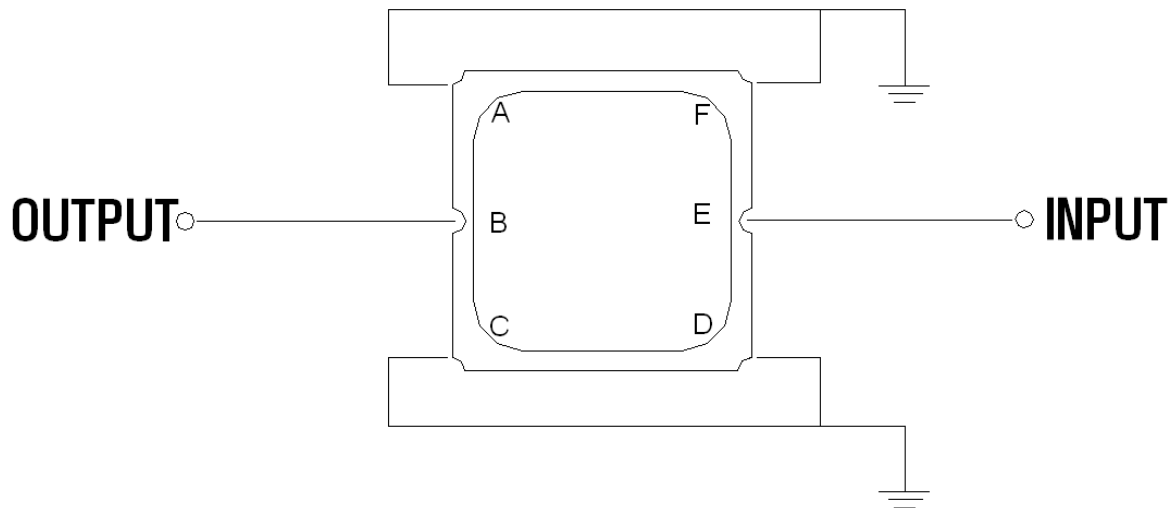

Source and Load Impedance: 50  $\Omega$

**Maximum Ratings**

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	-	+80
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	0
Maximum Input Power	dBm	-	-	30
Source Impedance (single ended) <sup>(1)</sup>	$\Omega//pF$	-	50	-
Load Impedance (single ended) <sup>(1)</sup>	$\Omega//pF$	-	50	-



Notes: No Matching Network

**Electrical Specification**

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	455	-
Insertion Loss in 452.5 ~457.5 MHz	dB	-	2.2	2.8
Attenuation:				
0.3 ~ 443.0 MHz	dB	25	26	-
462.5 ~ 467.5 MHz	dB	30	47	-
467.5 ~ 1500.0 MHz	dB	25	28	-
1500.0 ~ 2000.0 MHz	dB	15	22	-
VSWR in 452.5 ~ 457.5 MHz	-	-	1.5	2.0





## Frequency Performance

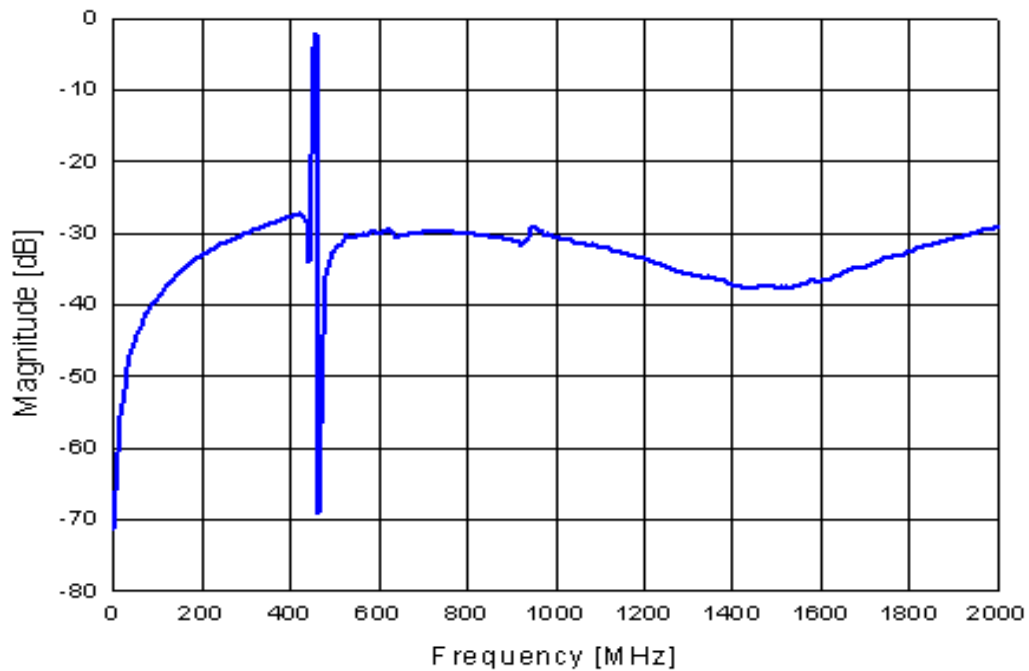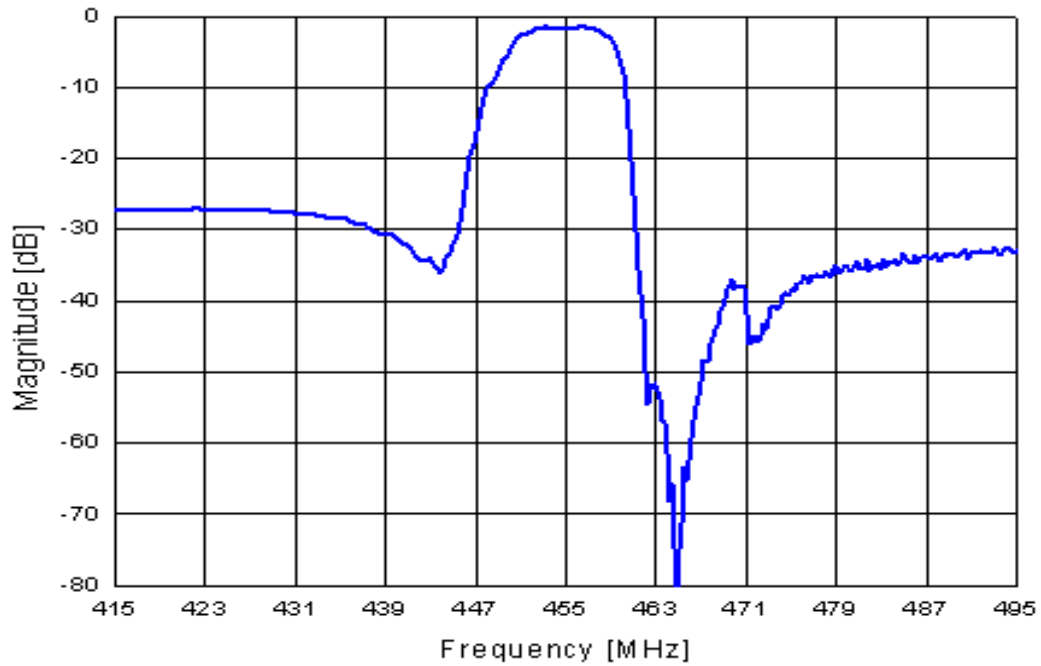



### VSWR

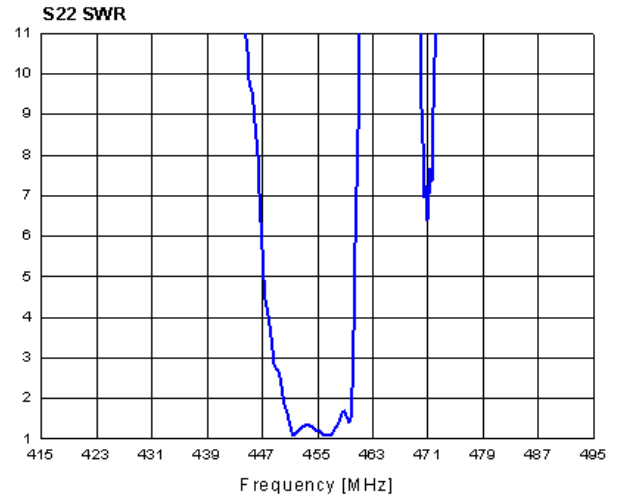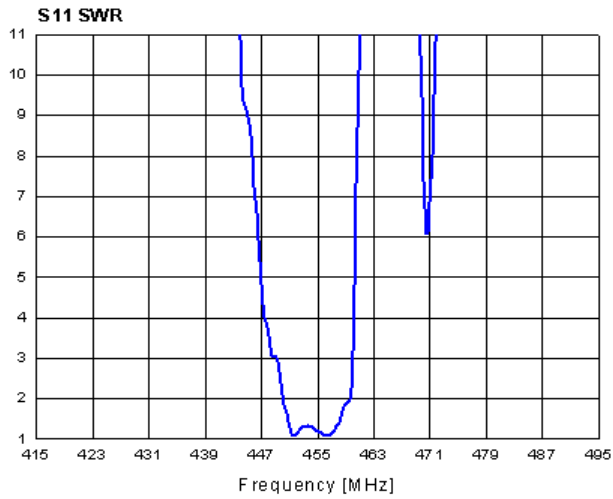

### Smith Chart

