

**Data Sheet**

Product Category: IF SAW Filter


Part Number
838-IF75.0M-EPackage
38.0 x 25.0 Thru HoleApplication
Base Station & RepeaterLast Modified
May 24 2003**TYPE :**75.0 MHz Bandpass Filter
19.20 MHz Bandwidth**PART NUMBER :****838-IF75.0M-E****OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS**

PARAMETERS	Minimum	Typical	Maximum	Units
Center Frequency	69.95	75.00	75.05	MHz
Insertion Loss	-	24.0	26.0	dB
1dB Bandwidth	18.90	19.00	-	MHz
3dB Bandwidth	19.20	19.40	-	MHz
18dB Bandwidth	-	20.20	20.40	MHz
33dB Bandwidth	-	20.50	20.70	MHz
50dB Bandwidth	-	20.70	20.90	MHz
Passband Ripple	-	0.65	1.0	dB
Group Delay Variation	-	65	100	nsec
Ultimate Rejection	50	55	-	dB
Substrate Material	-	LN	-	-
Ambient Temperature	-	25	-	°C

* Custom SAW IF Filters available. Contact Oscilent for assistance.

PACKAGE OUTLINE (mm)**TEST FIXTURE**

Contact Oscilent for Test Fixture Details

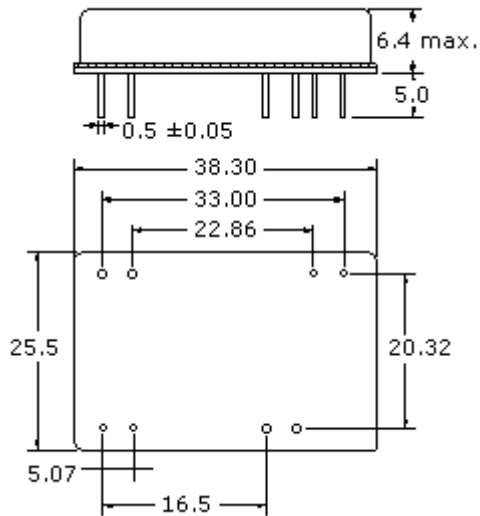

Oscilent Corporation - CALL **949.252.0522**

Part No.: 838-IF75.0M-E

17962 Sky Park Circle, Building D, Irvine, CA 92614, USA
Fax: 949.252.0599, E-Mail: Sales@Oscilent.com

Crystal Oscillators | Quartz Crystal | TCXO | VCXO | IF SAW Filter | RF SAW Filter | Ceramic Resonator
Crystal Filter | Ceramic Filter | SAW Filter / SAW Devices | Site Map