



REV A January 2011


Oscilent Controlled Document

Ordering Code / Part Number	Product Description
813-SL90.0M-29A	90.0 MHz IF SAW Filter 29.17 MHz Bandwidth

Specification Contents

- o Mechanical Dimensions
- o Test Circuit
- o Maximum Ratings
- o Electrical Specification
- o Frequency Response
- o Smith Chart
- o VSWR

Notes

- o Electrostatic Sensitive Device (ESD) 
- o Avoid excessive ultrasonic exposure
- o Solderability compatible with JEDEC J-STD-020C Pb-free process, 260°C peak reflow temperature
- o This product complies with EU directive 2002/95/EC (RoHS compliance)






Mechanical Dimensions (mm)



Pin Description	
A, B, C, D, F, G, H, I, J, L	Ground
K	Input
E	Output

Test Circuit

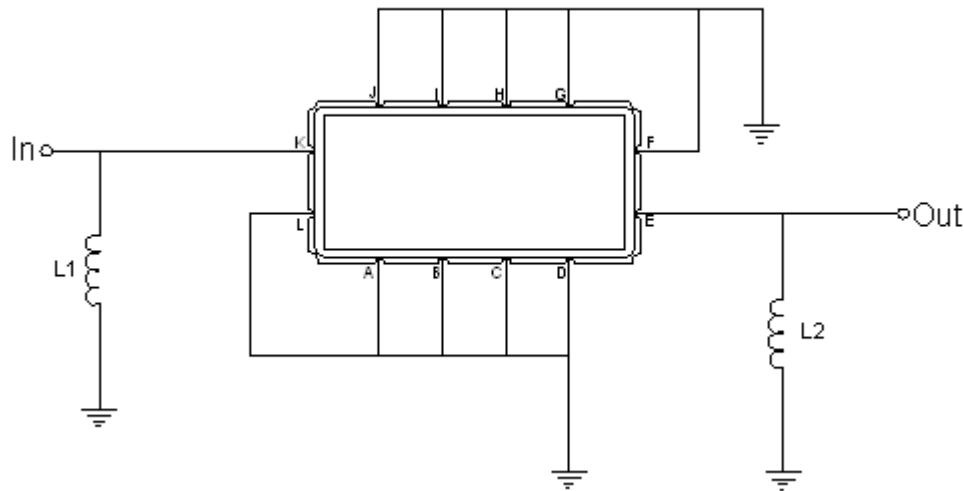

Test Fixture & Values	
Input	L1=68 nH
Output	L2=56nH
Source/Load Impedance	50 Ω

**Maximum Ratings**

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-20		70
Storage Temperature Range	°C	-40	-	85
Maximum DC Voltage	V	-	-	10
Maximum Input Power	dBm	-	-	10
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-

Notes: With Matching Network (Ref. Testing Environment Circuit as shown above).

Those impedances could be modified with different impedance values and/or structures, if necessary.


Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	89.85	90.0	90.15
Insertion Loss at Fo	dB	-	13.40	15.00
Passband Ripple (fo ±13.5 MHz)	dB _{p-p}	-	0.3	0.9
Group Delay Variation (fo ±13.5 MHz)	nsec	-	30	50
Absolute Delay at Fo	μsec	-	0.92	-
Bandwidth at -1.0 dB	MHz	28.00	29.17	-
Bandwidth at -3.0 dB	MHz	-	30.15	-
Bandwidth at -40.0 dB	MHz	-	34.35	35.00
Ultimate Rejection Level	dB	40	47	-
Temperature Coefficient	ppm/°C	-	-86	-




Frequency Response


Bandwidth at -1.0 dB

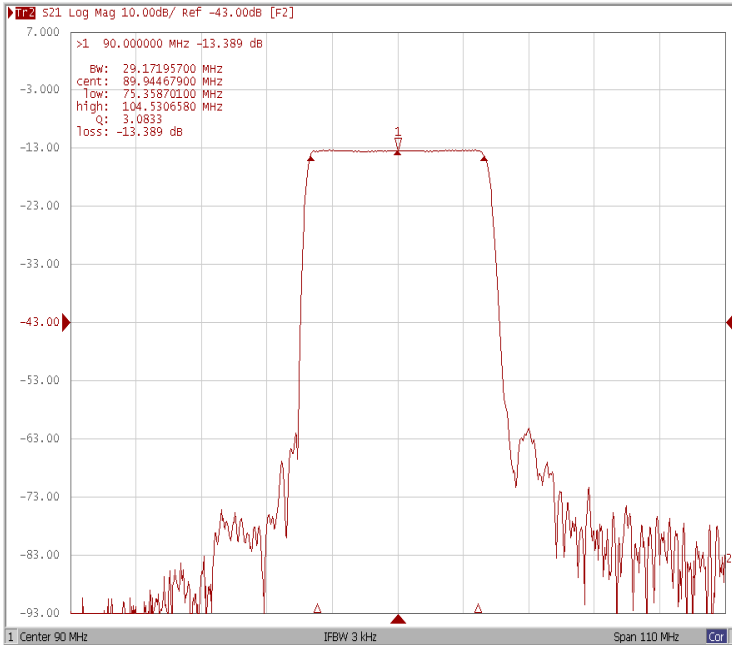


Bandwidth at -3.0 dB

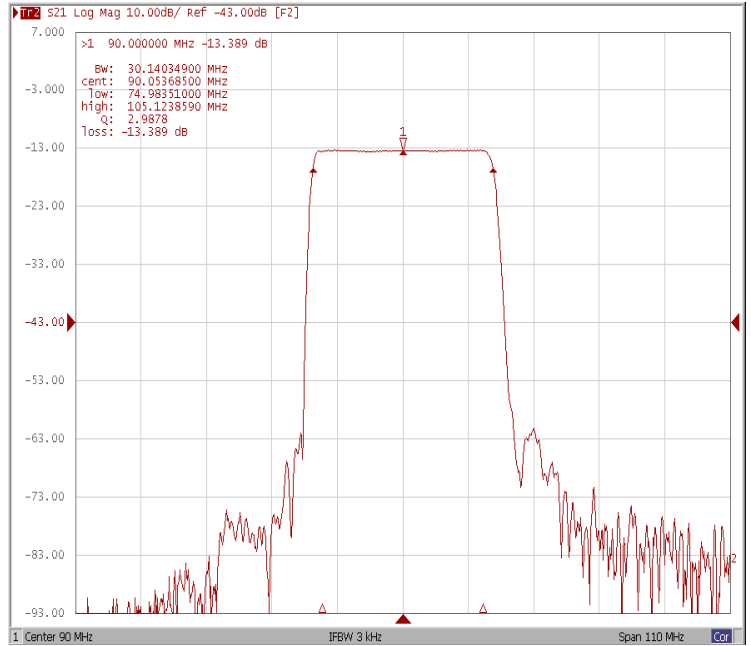

Bandwidth at -30.0 dB

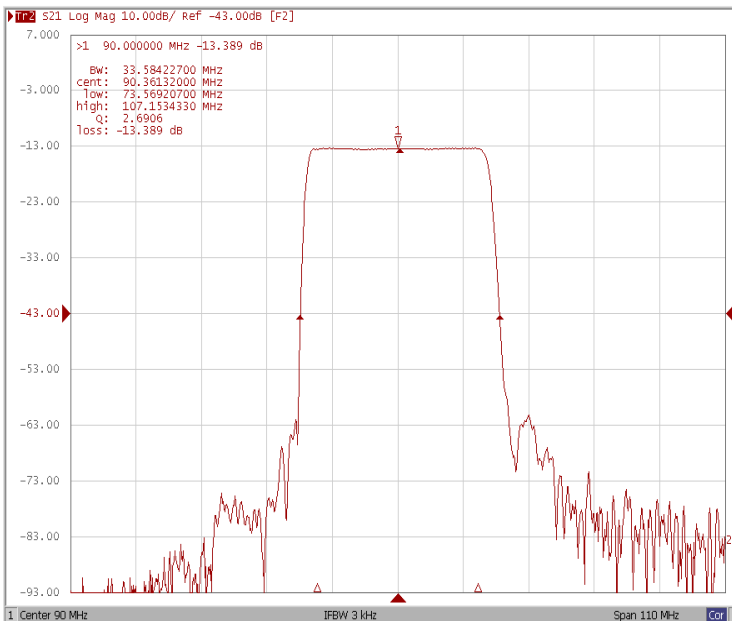


Bandwidth at -40.0 dB

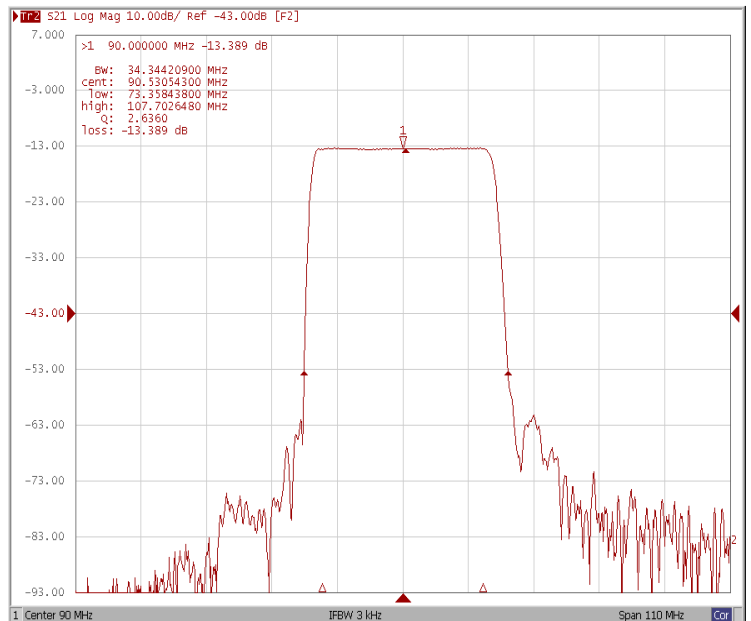





Ripple Variation $F_o \pm 13.5\text{MHz}$

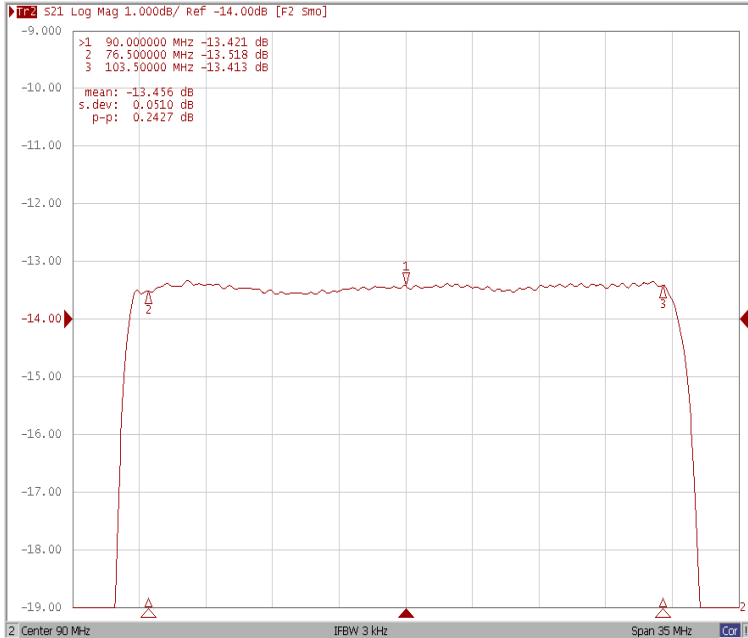

Group Delay Variation $F_o \pm 13.5\text{MHz}$

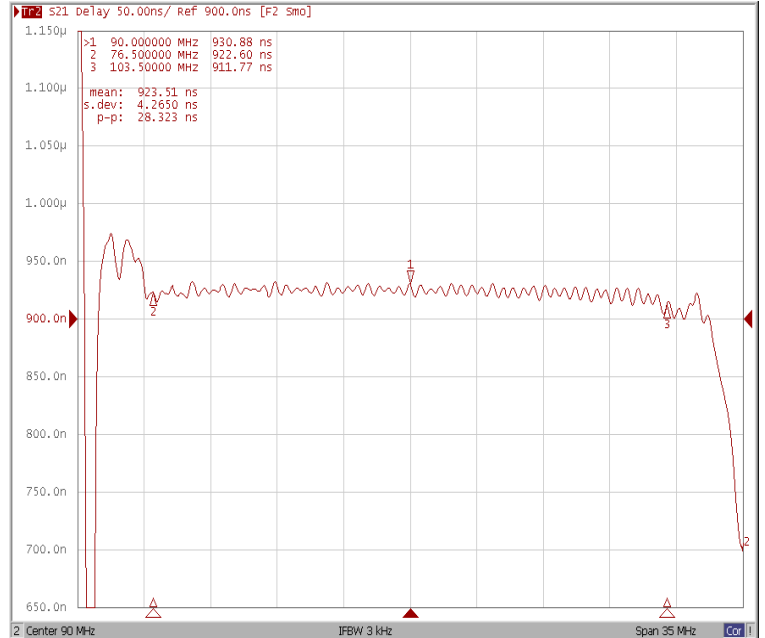

Smith Chart

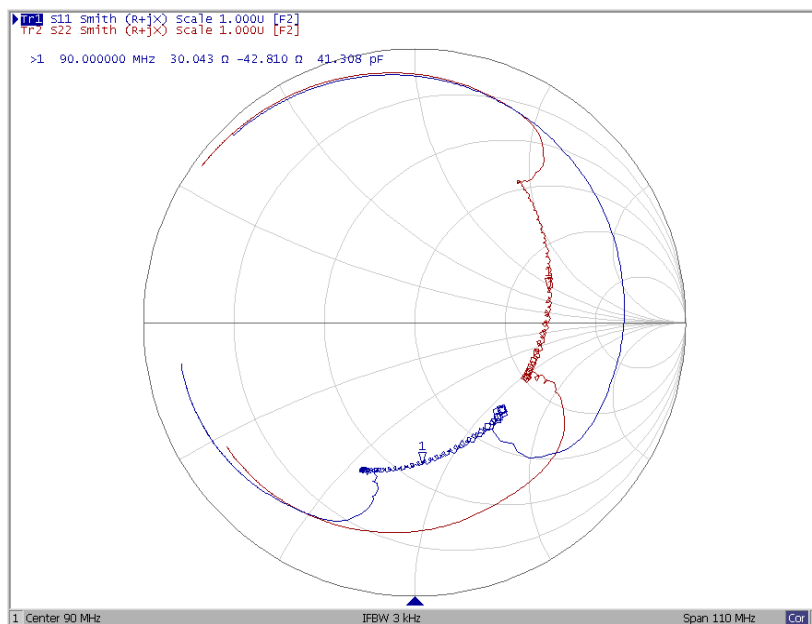



VSWR

