



PRODUCT SPECIFICATION

REV A January 2010


Oscilent Controlled Document

Ordering Code / Part Number	Product Description
802-RF1472.0M-A	RF Band Pass SAW Filter

Specification Contents

- o Mechanical Dimensions
- o Test Circuit
- o Maximum Ratings
- o Electrical Specification
- o Frequency Performance
- o VSWR
- o Smith Chart


Notes

- o Electrostatic Sensitive Device (ESD) 
- o Avoid excessive ultrasonic exposure
- o Solderability compatible with JEDEC J-STD-020C Pb-free process, 260°C peak reflow temperature
- o This product complies with EU directive 2002/95/EC (RoHS compliance)







Mechanical Dimensions (mm)

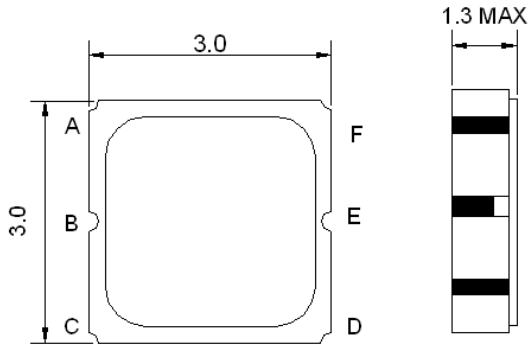

Pin Description	
A, C, D, F	Ground
E	In
B	Out

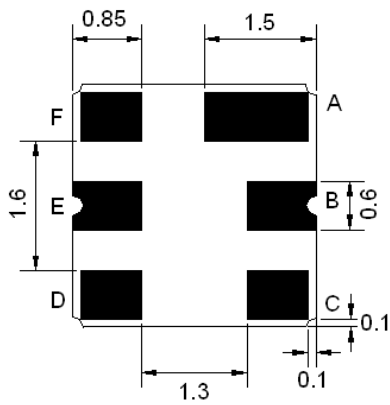

Test Circuit

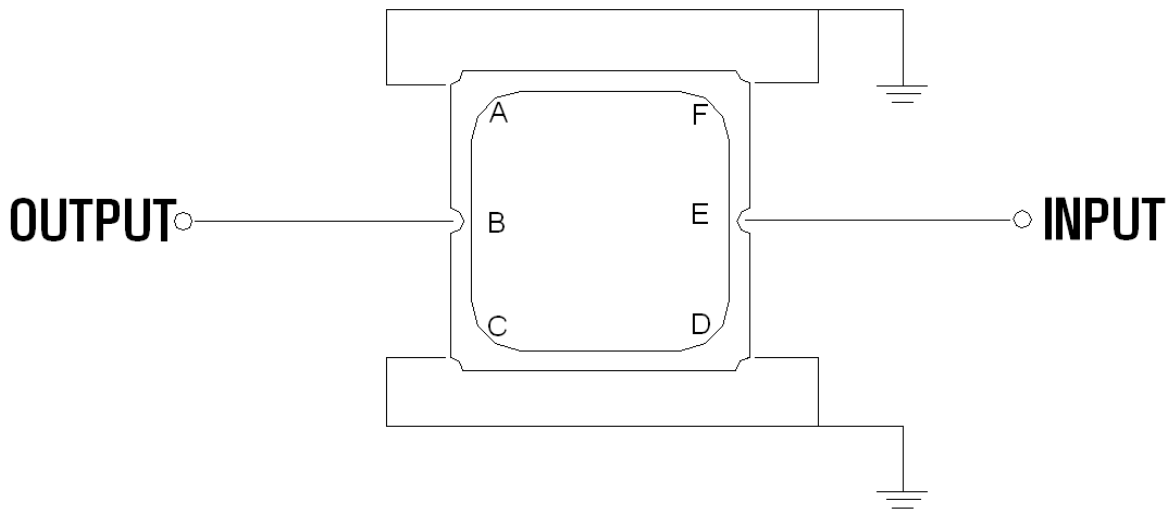

Source and Load Impedance: 50 Ω

**Maximum Ratings**

Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	5
Maximum Input Power	dBm	-	-	15
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-



Notes: No Matching Network (Ref. Testing Environment Circuit as shown above).

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fo)	MHz	-	1472.0	-
Insertion Loss within 1452.0 ~ 1492.0 MHz	dB	-	3.5	4.5
Amplitude Ripple within 1452.0 ~ 1492.0 MHz	dB _{p-p}	-	0.9	2.0
Attenuation:				
D.C. ~ 1300.0 MHz	dB	50	60	-
1300.0 ~ 1410.0 MHz	dB	40	50	-
1560.0 ~ 1620.0 MHz	dB	37	42	-
1620.0 ~ 2500.0 MHz	dB	35	45	-
2500.0 ~ 3000.0 MHz	dB	30	37	-
VSWR within 1452.0 ~ 1492.0 MHz	-	-	1.5	2.0





Frequency Performance

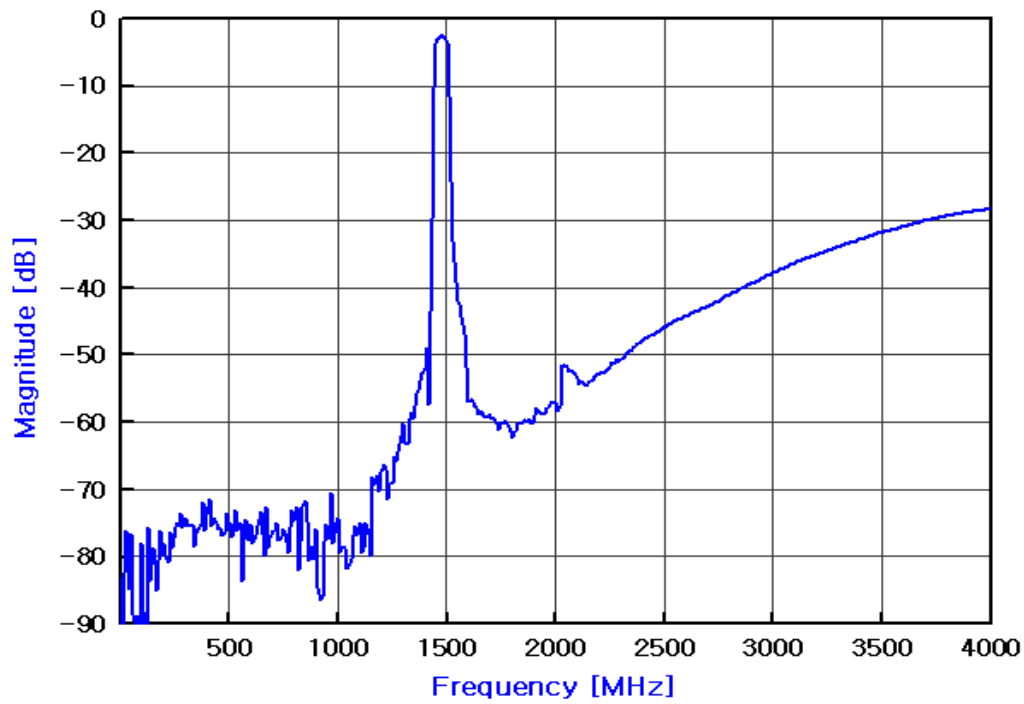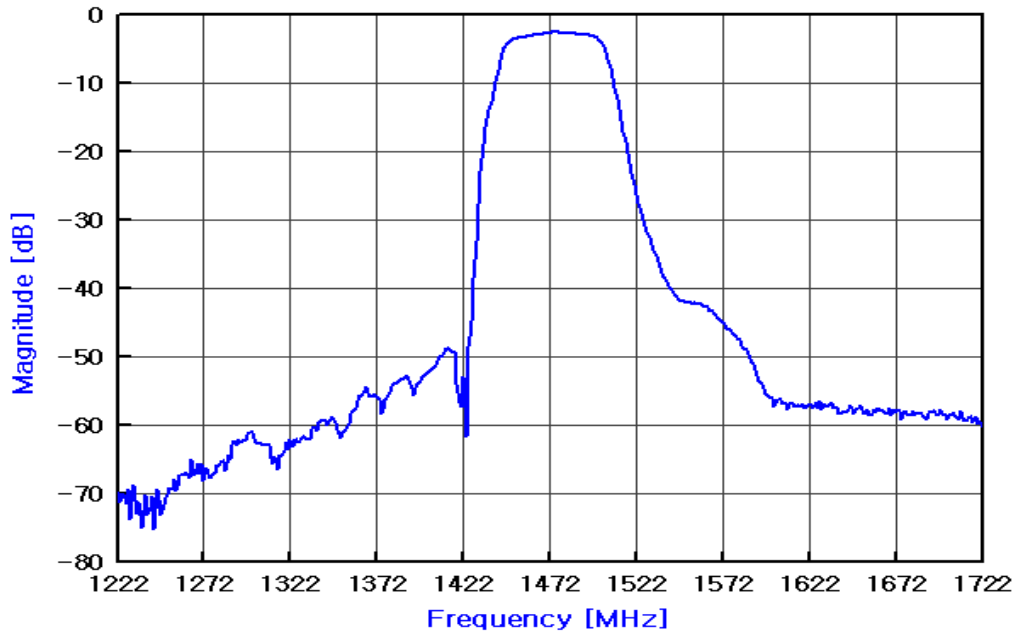





VSWR

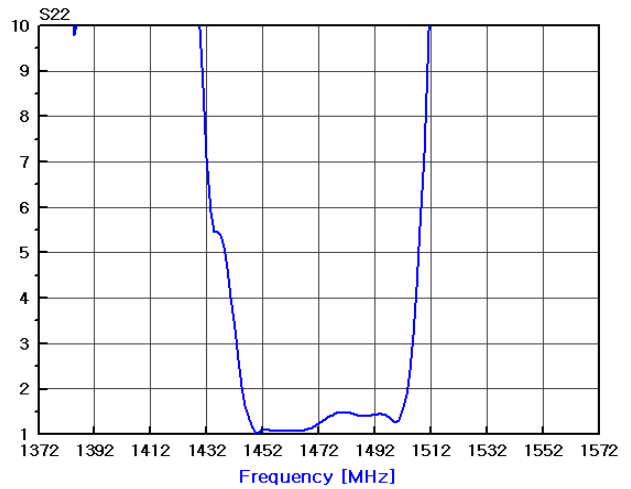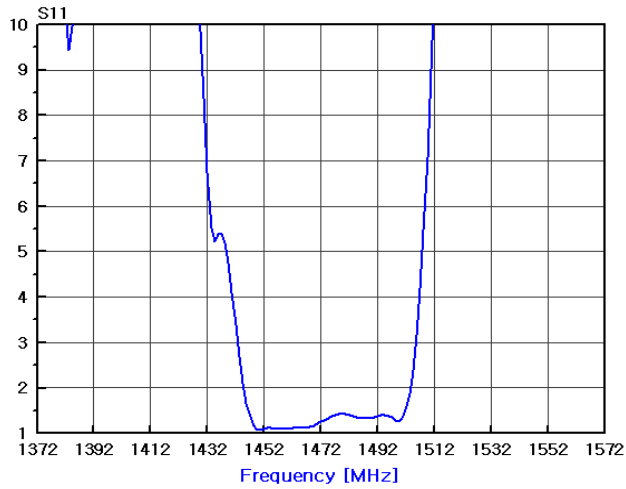

Smith Chart

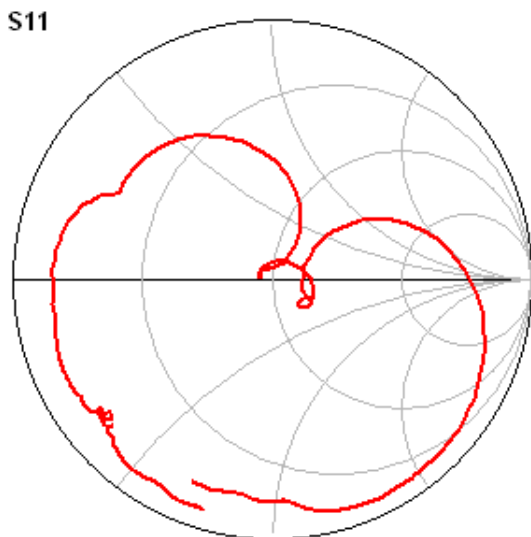

freq (1.222GHz to 1.722GHz)

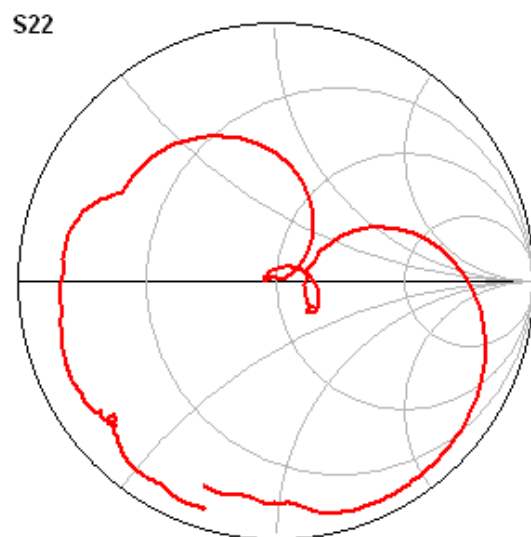

freq (1.222GHz to 1.722GHz)