




**Data Sheet**



Product Category: TXCO Surface Mount

Series Number	Package	Description	Last Modified
531 ~ 534	Surface Mount	HCMOS / TTL / Clipped Sine	Jan. 01 2007

**FEATURES**

- High stable output over wide temperature range
- 4.0mm maximum height
- Industry standard footprint layout
- RoHs / Lead Free compliant



**OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS**

PARAMETERS	CONDITIONS	531	532	533	534	UNITS
Output	-	TTL	HCMOS	Clipped Sine	Compatible*	-
Frequency Range	fo	1.2 ~ 100.0		10.0 ~ 27.0	1.2 ~ 100.0	MHz
Output	Load	10TTL Load or 15pF HCMOS Load Max.		20K ohm // 5pF	-	-
	Level	High	2.4 VDC min.	VDD -0.5 VDC min.	1.0 Vp-p min.	-
		Low	0.4 VDC max.	0.5 VDC max.		
Frequency Stability	Vs. Temp Range	See Table 1				-
	Vs. Input Voltage (5%)	±0.5 max.				PPM
	Vs. Load	±0.3 max.				PPM
	Vs. Aging (@+25°C)	±1.0 per year				PPM
Input	Voltage	+5.0 ±5%				VDC
	Current	20 max.		3 max.	-	mA
Frequency Adjustment	-	±3.0 min.				PPM
Rise Time / Fall Time	-	10 max.		-	-	nS
Duty Cycle	-	50 ±10% max.		-	-	-
Storage Temperature	(TSTG)	-40 ~ +85				°C
Control Voltage	-	2.5 ±2.0 Positive Transfer Characteristic				VDC


\*Compatible (534 Series) meets TTL and HCMOS mode simultaneously

**TABLE 1 - FREQUENCY STABILITY - TEMPERATURE TOLERANCE**

P/N Code	Temperature Range	Frequency Stability (PPM)							
		1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0
A	0 ~ +50°C	x	x	x	x	x	x	x	x
B	-10 ~ +60°C	x	x	x	x	x	x	x	x
C	-10 ~ +70°C		x	x	x	x	x	x	x
D	-20 ~ +70°C		x	x	x	x	x	x	x
E	-30 ~ +60°C			x	x	x	x	x	x
F	-30 ~ +70°C			x	x	x	x	x	x
G	-30 ~ +75°C			x	x	x	x	x	x
H	-40 ~ +80°C					x	x	x	x

x available all Frequency

**PACKAGE DIMENSIONS (mm)**

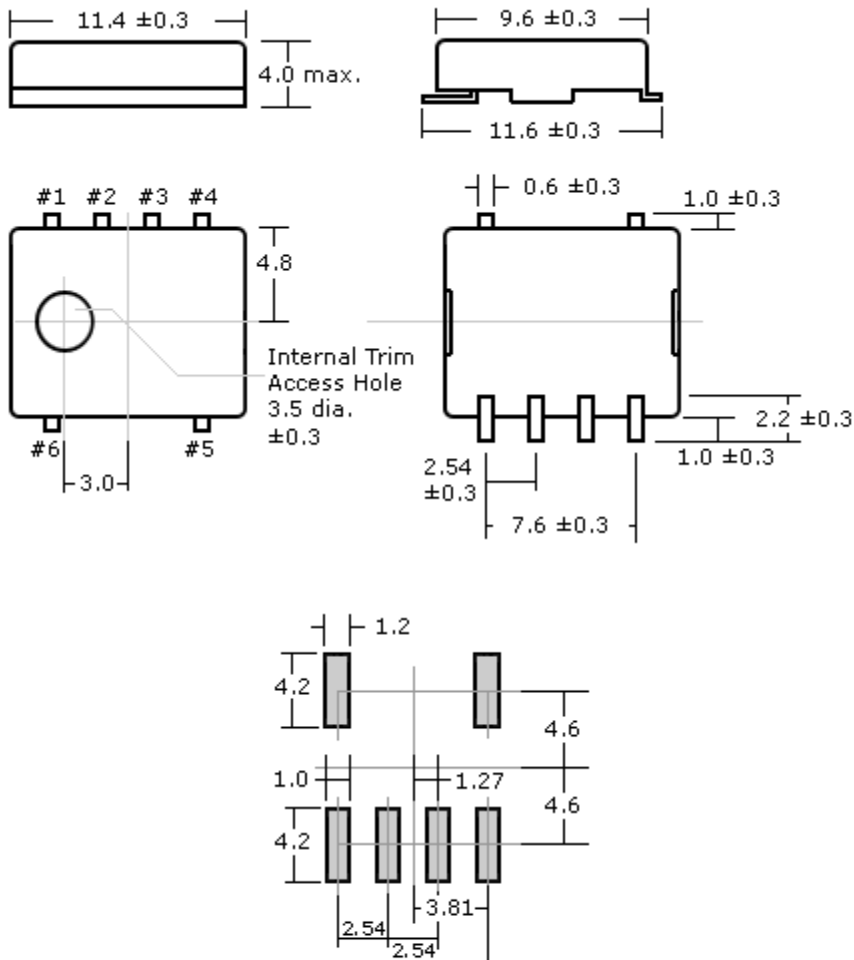

PIN CONNECTIONS	
#1	Vcc
#2	No Connection (NC) or Voltage Control (VC)
#3	Ground
#4	Output
#5	Ground
#6	Ground

Suggested Solder Pad Layout

**PART NUMBER GUIDE**

Series Number	Frequency	Voltage Supply Option	Frequency Stability (max.)	Operating Temp. (°C)	Frequency Deviation
<b>534</b>	<b>- 20.0 M</b>	<b>- 5</b>	<b>45</b>	<b>A</b>	<b>- NC</b>
Oscilent 531 = TTL 532 = HCMOS 533 = Clipped Sine Wave 534 = Compatible	Enter your desired frequency e.g. 12.0M = 12.000MHz	5 = 5VDC	15 = ±1.5 PPM 20 = ±2.0 PPM 25 = ±2.5 PPM 30 = ±3.0 PPM 35 = ±3.5 PPM 40 = ±4.0 PPM 45 = ±4.5 PPM 50 = ±5.0 PPM	A = 0 ~ +50 B = -10 ~ +60 C = -10 ~ +70 D = -20 ~ +70 E = -30 ~ +60 F = -30 ~ +70 G = -30 ~ +75 H = -40 ~ +80	NC = No Connection (TCXO) 05 = ±5 PPM min. 10 = ±10 PPM min.

**NOTE:** - Deviations on all parameters available. Please consult Oscilent for details.

**DEFINITIONS:** - Click on the characteristic names above for definitions of that particular characteristic.

**\*STANDARDS:** - "Blank" part number selections indicate standard variables for that particular characteristic.

**PACKAGING:** - Add **-TR** for Tape/Reel. Click [here](#) for tape/reel specifications

Oscilent Corporation - CALL 949.252.0522

Series No.: 531 to 534

18195 East McDermott Street, Building D, Irvine, CA 92614, USA  
 Fax: 949.252.0599, E-Mail: Sales@Oscilent.com

